


DISTRICT CONSERVATION AGENT'S REPORT

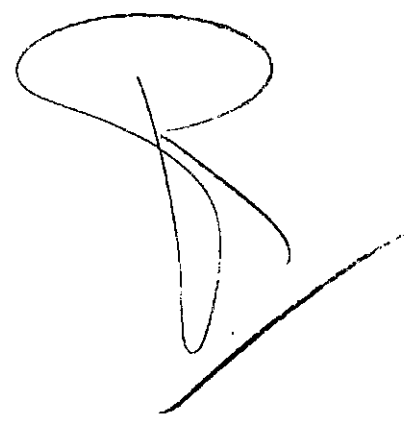

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION 2 1/2 NW NW
~~NE SW NW~~

SEC. 6 TWP. 21 RGE. 11-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Ringerling

Operator Phillips & Howard Address 1407 N. N. Bldg. Wichita-Kans.

Field _____ County Stafford

Total Depth 3578 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4 - 280 ft. Circulated with cement.
5 1/2" casing set at 3460 ft - Low Wells Plug
at 3330 ft. Filled with chat from 3330 ft to 3285 ft
Runned 4 sacks of cement at 3285 ft - Shot off
& pulled the 5 1/2" casing - Filled with mud to 285 ft.
Set Arch Bridge & 15 sacks of cement at 285 ft
Mud to 135 ft - Bridge & 10 sacks of
cement at the surface

AUG 7 - 1950 67-60

STATE CORPORATION
COMMISSION
KANSAS

C. M. Stough
District Conservation Agent

Date 8-4-50

PLUGGING
FILE SEC 6 T. 21 R. 11 W
BOOK PAGE 20 LINE 6

