
Form CP-3 Rev. 6-26-62

KANSAS

J. P. Roberts Administrator 500 Insurance Building Wichita 2, Kansas

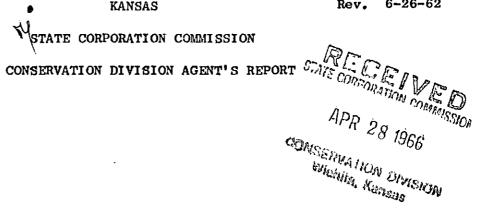

Operator's Full Name Bovaird	Supply Company
Complete Address: P. O. Box	897, Great Bend, Kansas
Lease Name Hoffman "A"	Well No. # 2
Location SE NW NE	Sec. 21 Twp. 21 Rge. 13 (E) (W) W
County Stafford	Total Depth 3672'
Abandoned Oil Well X Gas Well	Input Well SWD Well D & A
Other well as hereafter indicated:	
Plugging Contractor: Southwest	Casing Pulling Company
Address: Box 364, Great Bend	, Kansas License No. 399
Operation Completed: Hour 3:00PM	Day 26th Month April Year 1966
The Above well was plugged as follo	ewc:
293' of 8 5/8" surface pipe,	cemented with 225 sacks. 3670' of 52" long string,
cemented with 100 sacks. This	is an open hole. Bottom of the hole was sanded to
3650', and cemented with 5 sa	cks, through the dump bailer. 3000' of 52" long
string was recovered from the	hole. Bridge plug was pushed in fluid to 285',
rock bridge from 285' to 275'	. 5 sacks of cement was mixed in a barrel, and
put on plug at 275', through	the dump bailer, and let set over-night. Next day
hole was bailed dry, and 20 sfilled with mud to 40, rock to the base of the cellar.	acks of cement was added to the plug. Hole was bridge from 40' to 30', and cemented with 10 sacks
hereby certify that the above well	
DATE4/28/6	Well Plugging Supervisor

3121-1

INV. NO. -