


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Stafford County. Sec. 8 Twp. 21 Rge. 11 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

NW NE NE  
Lease Owner F.G. Holl  
Lease Name Scheufler Well No. 2  
Office Address 6427 East Kellog-Witchita, Kansas-67202  
Character of Well (Completed as Oil, Gas or Dry Hole)

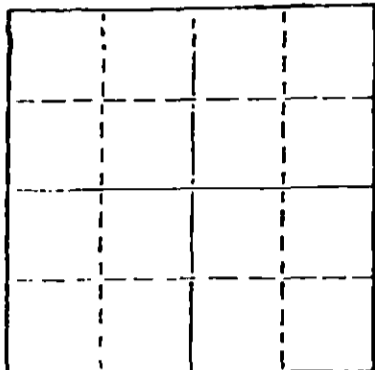

Locate well correctly on above  
Section Plat

~~abandoned~~ oil  
Date Well completed March 18 1963  
Application for plugging filed September 18 1980  
Application for plugging approved 19  
Plugging commenced September 25 1980  
Plugging completed September 30 1980  
Reason for abandonment of well or producing formation

depleted  
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well WM, T. Owen  
Producing formation Depth to top Bottom Total Depth of Well  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			297"	85/8	297'	None
			3427 $\frac{1}{2}$ '	4 $\frac{1}{2}$ "	3427 $\frac{1}{2}$ '	2506.13'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from feet to  
feet for each plug set.

Bottom hole plug, sand to 3300' with 4 sacks cement.

Used Allied Cementing to plug well. Pumping in 8 sacks  
Hulls, 25 sacks gell, 125 sacks cement.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Glenns casing Pulling Inc. Box 413 Ellinwood, Kansas 67526

STATE OF Kansas COUNTY OF Barton, ss.  
LaVon Glenn (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature) LaVon Glenn  
Ellinwood, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd. day of October, 1980



My commission expires

RECEIVED  
STATE CORPORATION COMMISSION  
Notary Public  
OCT - 3 1980  
CONSERVATION DIVISION  
Wichita, Kansas

W E L L   L O G

DATE COMMENCED: March 2, 1966  
 DATE COMPLETED: March 10, 1966

F. G. Holl  
 PAUL SCHEUFLER #2  
 NW NE NE Sec. 8-21s-11w  
 Stafford Co., Kansas

0	-	195	Sand & Clay
195	-	444	Red Bed
444	-	458	ANHYDRITE
458	-	854	Red Bed
854	-	1585	Shale & Shells
1585	-	2045	Lime & Shale
2045	-	2620	Shale & Lime
2620	-	2991	Lime
2991	-	2995	Shale
2995	-	3017	Lime & Shale
3017	-	3117	Shale
3117	-	3139	Brown Lime & Shale
3139	-	3370	Lime
3370	-	3410	Conglomerate & Shale
3410	-	3428	Dolomite

## ELEVATION:

## FORMATION DATA

Anhydrite	444
Heebner	2991
Brown Lime	3117
Lansing	3139
Arbuckle	3410
R.T.D.	3428

SURFACE CASING: Set 8-5/8"  
 at 297' with 250 sacks  
 cement.

PRODUCTION CASING: Set 4 1/2"  
 casing at 3427 1/2' with 600  
 gals. latex cement.

A F F I D A V I T

STATE OF KANSAS  
 COUNTY OF BARTON ss.

L. O. Chubb, of lawful age, does swear that the facts and  
 statements herein contained are true and correct to the best of his  
 knowledge.

  
 L. O. Chubb

Subscribed and sworn to before me this 21 day of March, 1966.

My Commission Expires:

June 24, 1967

  
 Clair E. Stinson NOTARY  
 PUBLIC

RECEIVED  
 STATE CORPORATION COMMISSION  
 SEP 19 1980  
 CONSERVATION DIVISION  
 Wichita, Kansas