

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22861-00-00
Spot: NWSWNW Sec/Twnshp/Rge: 8-21S-11W
3630 feet from S Section Line, 4950 feet from E Section Line
Lease/Unit Name: KEELER A Well Number: 1-8
County: STAFFORD Total Vertical Depth: 3523 feet

Operator License No.: 5056
Op Name: HOLL, F.G., COMPANY L.L.C.
Address: 9431 E CENTRAL, SUITE 100
WICHITA, KS 67206

Production Casing Size: 5.5 feet: 3520 WITH 175 SX CMT
Surface Casing Size: 8.625 feet: 260 WITH 225 SX CMT

8714 50

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/17/2003 4:15 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 278-2026

Proposed Plugging Method: SAND OFF TO 3380'. PLUG AT 550' WITH 50 SX CMT. PLUG AT 270' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: JIM HOLLAND Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 07/17/2003 5:15 PM KCC Agent: SCOTT ALBERG

Actual Plugging Report:


PBTD 3440'. PERFS AT 3454-3456, 3444-3448, 3428-3436'. SAND BACK TO 3368' WITH 5 SX CMT ON TOP. 1ST PLUG SPOT 12 SX GEL & 50 SX CMT AT 550'. 2ND PLUG PULL TO 270' & SPOT 50 SX CMT. 3RD PLUG PULL TO 40' & SPOT 15 SX CMT.

RECEIVED
JUL 24 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ACID SERVICES. RECOVERED 2246' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

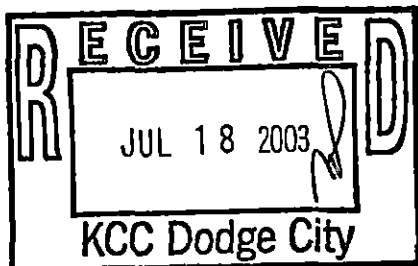

Signed

[Signature]
(TECHNICIAN)

INVOICED

DATE 7-24-03

INV. NO. 200406 0714

[Signature]
Form R-2/3