


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

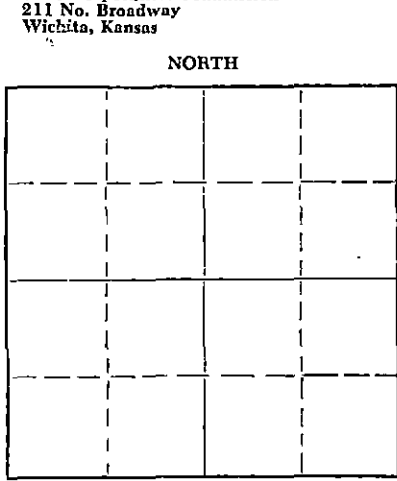

Locate well correctly on above Section Plat

Stafford County. Sec. 10 Twp. 21 Rge. (E) 14 (W)  
Location as "NE/CNW/SW" or footage from lines NE 1/4 SW 1/4 NE 1/4  
Lease Owner Lewis Drilling Company  
Lease Name Shepherd Well No. 3  
Office Address 915 Union Center, Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 6-21 1957  
Application for plugging filed 7-9 1957  
Application for plugging approved 7-9 1957  
Plugging commenced 7-23 1957  
Plugging completed 7-23 1957  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. B. Brundage  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	-830'	-0-
				5 1/2"	3552'	2991

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dumped sand through casing to 3480'. Ran 5 sacks cement 3480 to 3450'.  
Ran mud to 280'. Set bottom plug at 280' with 20 sacks cement. Ran  
mud to 20'. Set top plug with 5 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & S Pipe Pulling Co.  
Address Box 192 Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
J. Fred Hambright (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, that I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. Fred Hambright  
915 Union Center, Wichita 2, Ks.  
(Address)

SUBSCRIBED AND SWORN to before me this 30 day of July, 19 57

A. R. Derrington Notary Public.

My commission expires 8-20-60

PLUGGING  
FILE SEC. 10 T. 21 R. 14 W  
BOOK PAGE 26 LINE 11

7-31-1957

WELL LOG

15.185.12201.0000

COMPANY Lewis Drilling Company

SEC. 10 T. 21 R. 14

FARM Shepherd

NO. 3

LOC. NE 1/4 SW 1/4 NE 1/4

TOTAL DEPTH 3585

COMM. 6-9-57


COMP. 6-21-57

COUNTY Stafford KANSAS

SHOT OR TREATED

CONTRACTOR Lewis Drilling Company

ISSUED



CASING

20	10
15	x 8 1/2" = 830'
12	6
13	x 5 1/2" = 3552'

ELEVATION 1935 K.B.

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Geologic Tops

0-100	Sand
100-230	Sand & shale
230-285	Blue shale
285-325	Sand
325-440	Shale
440-695	Shale & red beds
695-825	Red beds
825-860	Anhydrite
860-890	Red beds
890-3180	Line & shale
3180-3280	Line
3280-3460	Line & shale
3460-3585	Line
3585	T.D.

Hoebner shale	3238
Brown line	3355
Lansing Kansas City	3365
Base Kansas City	3579
Total Depth	3585

RECEIVED STATE CORPORATION COMMISSION

JUL 3 1 1957

CONSERVATION DIVISION

PLUGGING  
 FILE SEC. 10 T. 21 R. 14W  
 BOOK PAGE 26 LINE 17

State of Kansas }  
County of Sedgwick }

I, J. Fred Hambricht of the Lewis Drilling Company

upon oath state that the above and foregoing is a true and correct copy of the log of the Shepherd #3 well.

*J. Fred Hambricht*

Subscribed and sworn to before me this 25 day of June 19 57

*A. R. Derrington*

My Commission Expires: 8-20-59

(A. R. Derrington)

NOTARY PUBLIC