

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Stafford County, Sec. 30 Twp. 21 Rge. 11 (X) (W)

Location as "NE/CNW/SW" or footage from lines NE NW SW

Lease Owner H.C. Bennett

Lease Name Duggan Well No. 4

Office Address 1212 Union National Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed 10-9-60 19

Application for plugging filed 7-1-66 19

Application for plugging approved 7-5-66 19


Plugging commenced 7-27-66 19

Plugging completed 8-1-66 19

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

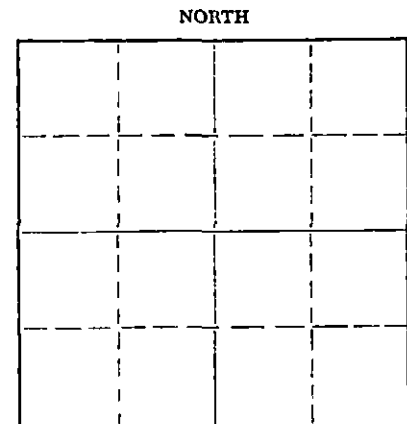

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3640 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	275'	none
				4 1/2	3640'	2720'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 15' rock bridge at 3420' and dump 3 sacks of cement

Set 15' rock bridge from 270' to 255' and mix and dump 2 sacks of calseal

Let calseal set over night

Bail hole down to bridge and dump 25 sacks of cement

Mud hole down to 40' and dump 10 sacks of cement

Stamp: AUG 12 1966
8-12-66
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Flint Engineering and Construction Co.
Address 2375 W. Central, El Dorado, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James Davis

(Address)

SUBSCRIBED AND SWORN to before me this 10 day of August, 19 66

Ronald R. Hanson
Notary Public.

My commission expires Sept. 27, 1967

760
490

3548
490
3058

52

15.195.19530.0000


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company. PICKRELL DRILLING CO.
Farm. Duggan No. 4

SEC. 30 T. 21 R. 11W
NE NW SW

Total Depth. 3640'
Comm. 9-27-60 Comp. 10-9-60
Shot or Treated.
Contractor. Western Petroleum Co.
Issued. 3-4-61

County Stafford
KANSAS



CASING:
8 5/8" 275' cem w/275 sx.
4 1/2" 3640' cem w/375 sx.

75

Elevation. 1797' KB

Production. 25 BOPD

Figures Indicate Bottom of Formations.

sand	40
sand & clay	150
red bed	542
Anhydrite	565
shale	570
shale & shells	1485
lime & shale	3258
lime	3457
lime, sand, chert	3493
lime & Conglomerate	3525
Conglomerate & lime chert	3540
Conglomerate	3570
lime	3640
Total Depth	

TOPS: SCOUT	
Heebner	3051
Brown Lime	3180
Lansing	3195'
Base Kansas City	3415
Conglomerate	3460

RECEIVED
STATE INDUSTRIAL COMMISSION

AUG 12 1966

CONSERVATION DIVISION
WICHITA, KANSAS

sands to 3420 + 3 sd