


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

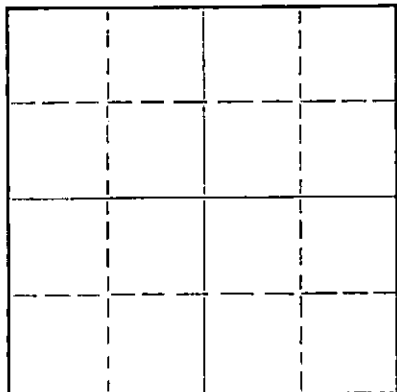

Locate well correctly on above
Section Plat

Stafford County, Sec. 30 Twp. 21S Rge. (E) 11 (W)

Location as "NE/CNW/SW" or footage from lines. SE SW NE
Lease Owner. Tilco et al
Lease Name. McMillan Well No. 1
Office Address. P.O. Box 486 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed December 12 19 69
Application for plugging filed December 12 19 69
Application for plugging approved December 12 19 69
Plugging commenced December 12 19 69
Plugging completed December 12 19 69
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Herman Justice
Producing formation. Depth to top. Bottom. Total Depth of Well 3540 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	264'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with 100 sacks 50/50 Pozmix and 6 % Gel

RECEIVED
STATE CORPORATION COMMISSION
JAN 21 1970
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor. Leben Drilling, Inc.
Address. P.O. Box 486 Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
James R. Rodgers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James R. Rodgers
James R. Rodgers
P.O. Box 486 Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 19th day of January, 1970



Helen L. Lindenmuth
Notary Public.

November 13, 1973

DRILLER'S LOG

COMPANY: Tilco et al
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: McMILLAN #1
 LOCATION: SE SW NE SECTION 30-21S-11W
 STAFFORD COUNTY, KANSAS
 COMMENCED: 12-5-69
 COMPLETED: 12-12-69

0	110	Sand
110	266	Red Bed
266	900	Red Bed
900	1360	Shale & Shells
1360	1590	Shale & Lime Stks.
1590	1785	Lime
1785	2825	Shale & Lime
2825	3495	Lime
3495	3540	Lime & Chert
	<u>3540</u>	RTD D & A

8 5/8 New 20# Surface Casing set @ 264' with 265 sacks Common Cement with 2% C.C.

I, James R. Rodgers, do hereby certify that the above and foregoing is a true and correct copy of the log of the McMillan #1 Well, located SE SW NE of Section 30, Township 21 South, Range 11 West, Stafford County, Kansas, as reflected by the records of Leben Drilling, Inc.

James R. Rodgers
 James R. Rodgers

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 19th day of January, 1970.

Helen L. Lindenmuth
 Helen L. Lindenmuth

My Commission Expires:
 November 13, 1973