

RECEIVED
STATE CORPORATION COMMISSION

15.145.00765.0000

JUL 1 1974

CONSERVATION DIVISION
Wichita, Kansas


Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027

Wichita, Kansas 67217
NORTH

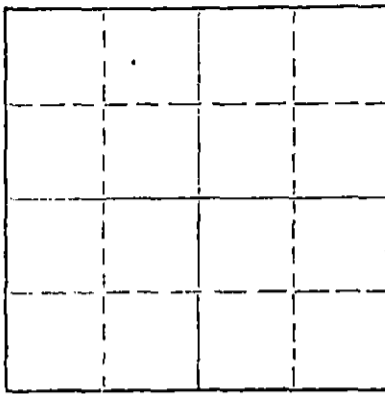

Locate well correctly on above
Section Plat

Pawnee County, Sec. 11 Twp. 21 S Rge. (E) 16 (W)
Location as "NE/CNW/SE/SW" or footage from lines C W/2 NE NE
Lease Owner Braden Deem Inc.
Lease Name Bowman Well No. 4
Office Address 200 W. First st. Wichita Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19 52
Application for plugging filed May 7 19 74
Application for plugging approved May 8 19 74
Plugging commenced June 12 19 74
Plugging completed June 17 19 74
Reason for abandonment of well or producing formation dry
If a producing well is abandoned, date of last production 11 - 16 19 73
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Arbuckle Depth to top 3787 Bottom 3790 Total Depth of Well 3790 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	980	8 5/8		
		0	3788	5 1/2		2405

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with sand to 3770 dumped 4 sx. cement.
Set bridge at 400 ft. filled to bottom of cellar with 5 1/2 yds. of readymix cement.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Nicholas Casing pulling
Address Box 373 Geneseo Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
George A. Nicholas (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George A. Nicholas

(Address)

Sworn to before me this 28th day of June, 1974



September 24, 1974

Warren H. Laughlin
Notary Public.

STENCILED

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

ORIGINAL

15.145.00765.0000

NOV 26 1968

COMPANY ALPINE OIL & ROYALTY CO.

SEC. 11 T. 21 R. 16W
LOC. CW/2 NE NE

FARM Bowman NO. 8

TOTAL DEPTH 3790'

COUNTY Pawnee

COMM. 11-24-63

COMP. 1-16-64

SHOT OR TREATED

KANSAS			

CONTRACTOR Wuaker Drig.

ISSUED 11-26-66

CASINO

20	10
15	B 5/8
12	6
13	5 1/2

980' w/475 sx cem.

ELEVATION 1977' KB

3788' w/100 sx cem.

PRODUCTION Pmp. 140

FIGURES INDICATE BOTTOM OF FORMATIONS. BOPD, NW, (Arb 3788-90)

COMPLETE DRILLERS LOG NOT AVAILABLE.

RECEIVED
STATE CORPORATION COMMISSION

MAY 8 - 1974

CONSERVATION DIVISION
Wichita, Kansas

TOPS: SCOUT	SAMPLE
Anhydrite	972
Heebner	3332
Brown Lime	3425
Lansing	3434
B/Kansas City	3656
Viola	3705
Simpson	3749
Arbuckle	3786

YOUR COPY