

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
of formations.

NORTH

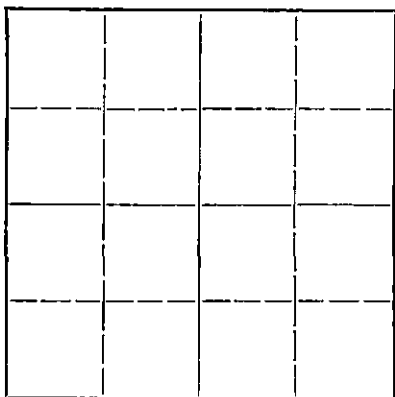

Locate well correctly on above
Section Plat

Stafford County, Sec. 11 Twp. 21 Rge. (E) 13 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SW/4 SW/4 NW/4
Lease Owner. Phillips Petroleum Co.
Lease Name. Carsip Well No. 1
Office Address. Box 779 Great Bend, Kans.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed. 9-1-49 19
Application for plugging filed. 9-1-49 19
Application for plugging approved. 9-1-49 19
Plugging commenced. 9-1-49 19
Plugging completed. 9-2-49 19
Reason for abandonment of well or producing formation. Dry Hole
If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. C.D. Stough
Producing formation. Arbuckle Depth to top. 3550 Bottom. Total Depth of Well. 3580 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Heebner		3130		8 5/8"	268'	None
Toronto		3150				
Brown Lime		3257				
L.K.C.		3270	3495			
Cong.		3501				
Simpson Shale		3515				
Arbuckle		3550				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet tofeet for each plug set.

Ran 25 sacks cement on bottom - Filled with mud to 273' - Set wood plug
and ran 15 sacks cement - Filled with mud to 30' - Set wood plug and ran
10 sacks cement to cap, filling to base of cellar.
Plugging completed 1:00 AM, 9-2-49.

RECEIVED

Conservation Div.

9-9-49

SEP 9 X 1949

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. N.C. Mortimer
Address. Box 779 Great Bend, Kans.

STATE CORPORATION
COMMISSION
KANSAS


STATE OF Kansas, COUNTY OF Barton, ss.
N.C. Mortimer (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *N.C. Mortimer*
Box 779 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 8th day of September, 19 49.

My commission expires March 27, 1950

Notary Public.



Formation Record

Lease Cartip

Well No. 1

FROM	TO	Formation	REMARKS
0	135	Sand, Anhydrite and Shale	
135	225	Anhydrite and Shale	8 5/8" casing set at 274' D.
225	497	Sol Sol and Shale	
497	920	Shale and Shells	
920	1140	Shale and Shells	
1140	1333	Shale and Shells	
1333	1607	Shale and Lims	
1607	1672	Lims	
1672	2208	Lims and Shale	
2208	2245	Shale	
2245	2500	Lims and Shale	Top L.E.O. 2270' Base 2405'
2500	3300	Lims	Top Anhydrite 2600'

Took Drill Stem test at 25.
of 2600' with probe set at
2600'. Cool open 45 min.
Had strong blow and recovered
600' muddy salt water.

PLUGGING
 FILE SEC 11 T 21 R 134
 BOOK PAGE 112 LINE 25

RECEIVED

Conservation Div.

SEP 9 X 1949

STATE CORPORATION
 COMMISSION
 KANSAS