


DISTRICT CONSERVATION AGENT'S REPORT

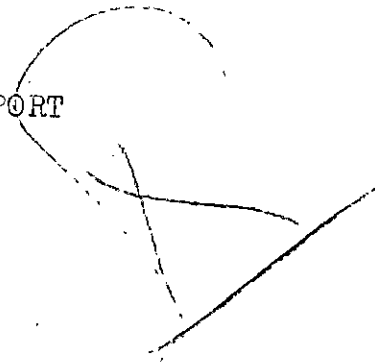

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 91-43

LOCATION nw-nw-nw

SEC. 4 TWP. 21 RGE. 12-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Hewitt

Operator G.W. Hayes Drilling Co. Address Ellenwood-Houses

Field _____ County Stafford

Total Depth 3477 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4 - 258 ft. Circulated with Cement.
5 1/2" casing in hole - Plugged back from bottom to
3160 ft. With heavy well plug - Mud & shot - Dumped
5 sacks of cement at 3160 ft - Shot & pulled the 5 1/2" casing -
filled with mud to 250 ft - Rock bridge & 15 sacks cement at 250 ft
Mud to 30 ft - Plug & 10 sacks of cement at the surface.
West Supply Co. Plugging Contractors -

RECEIVED

Conservation Div.

C. H. Stough
District Conservation Agent

Date 4-20-49

PLUGGING 1949
FILE SEC 44-21-R-43
BOOK PAGE 94 LINE 43