


DISTRICT CONSERVATION AGENT'S REPORT

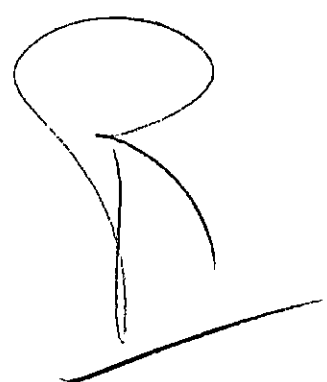

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. \_\_\_\_\_

LOCATION SE-SE-NW

SEC. 15 TWP. 21 RGE. 13 W

Dry Hole X Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease Crust

Operator Petroleum, Inc. Address 314, Morby Bldg. - Wichita, Kans.

Field \_\_\_\_\_ County Stafford

Total Depth 3657 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/8 - 196 ft - Circulated with cement.  
5 7/8" casing set at 3637 ft - Plugged back from bottom to  
3575 ft with mud & chat - 9 sacks of cement dumped at 3575 ft.  
Shot off & pulled the 5 7/8" casing - Filled with mud to 196 ft.  
Set Rock Bridge & 15 sacks of cement at 196 ft - mud  
to 30 ft - Bridge & 10 sacks of cement at the surface

**PLUGGING**  
FILE SEC 15 TWP 21 RGE 13 W  
BOOK 133 LINE 14

G. W. Stouck  
District Conservation Agent

Date 1-7-50

JAN 11 1950

1-11-1950