


DISTRICT CONSERVATION AGENT'S REPORT

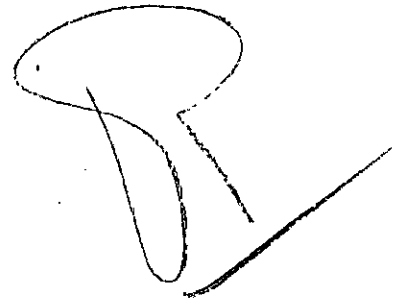

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION SE-SE-NE

SEC. 12 TWP. 21 RGE. 18-W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 2 Lease Taylor

Operator Virginia Drilling Co Address #701 Brown Bldg-Wichita-Kans.

Field _____ County Stafford

Total Depth 3591 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4 - 260 ft. Circulated with cement
5/8 casing at 3570 ft. - Cemented with 80 sacks cement
Plugged back to 3240 ft. with Lane Wells Plug
& Chat - Dumped 5 sacks of cement at 3240 ft.
ripped off & pulled the 5/8 casing - went to 260 ft.
Set Rock Bridge & 15 sacks of cement at 260 ft. went to 30 ft.
Plug & 10 sacks of cement at the surface.

PLUGGING
FILE SEC 22T 21 R 12W
BOOK PAGE 74 LINE 27

C. H. Stough
District Conservation Agent
Date 4-17-51

APR - 9 1951 4-9-1951
CONSERVATION DIVISION
Wichita, Kansas