


DISTRICT CONSERVATION AGENT'S REPORT

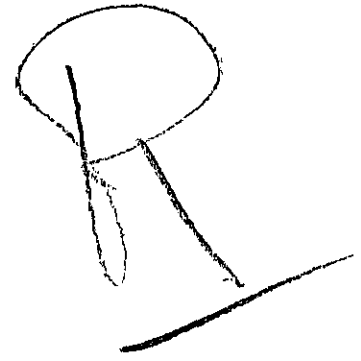

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. SE NW NE

LOCATION ~~SE NE NE~~

SEC. 22 TWP. 21 RGE. 12-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 4 Lease Taylor

Operator Virginia Belling Co. INC. Address 7401 Brown Alder Wichita-Kans.

Field \_\_\_\_\_ County Stafford

Total Depth 3584 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 287 ft. Circulated with cement  
5/8 casing set at 3566 ft. Cemented with 125 sacks cement.  
Plugged back to 3315 ft with Low Wells Plug. Chat  
feels 3315 ft to 3270 ft - Mixed 5 sacks of cement  
at 3270 ft. Ripped off & pulled the 5/8 casing  
back to 287 ft - Set Rock Bridge & 15 sacks of cement  
at 287 ft. Mixed to 30 ft. Plug & 10 sacks of  
cement at the surface.

RECEIVED  
STATE CORPORATION COMMISSION

PLUGGING

FILE SEC 22 T 21 R 12  
BOOK PAGE 55 LINE 20

JAN 13 1951

CONSERVATION DIVISION  
Wichita, Kansas

C. D. Stough  
District Conservation Agent

Date 1-10-51

SE NW NE

1-31-51

F