

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Kiowa County. Sec. 14 Twp. 28 Rge. 17 ~~XXX~~ W (W)

Location as "NE/CNW*SW*" or footage from lines SE SE NE

Lease Owner Sam B. Smith, Jr.

Lease Name Ross Well No. 1

Office Address 832 Carter, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 26 19 57

Application for plugging filed October 26 19 57

Application for plugging approved October 26 19 57


Plugging commenced October 26 19 57

Plugging completed October 26 19 57

Reason for abandonment of well or producing formation no oil in commercial quantities found

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

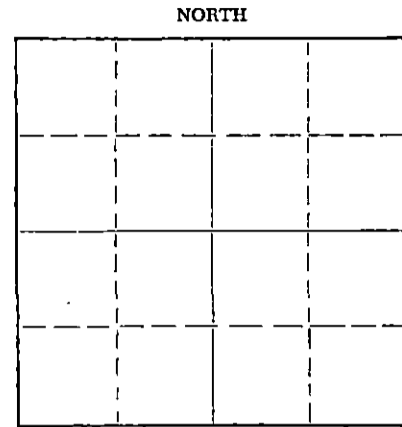

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well M. A. Rives

Producing formation Depth to top Bottom Total Depth of Well 4832 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	440'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with extra heavy rotary mud from total depth to 350'. Set Plug #1 at 350' cemented with 1/4 sack Hulls and 20 sacks cement, through drill pipe. Filled hole with extra heavy rotary mud from Plug #1 to 35'. Set Plug #2 at 35' cemented with 1/4 sacks Hulls and 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Prime Drilling Company

Address 811 Union Center, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Sam B. Smith, Jr. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Sam B. Smith, Jr.

832 Carter Avenue, Wichita 3, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 30 day of October, 1957

J. Roberts Notary Public.

My commission expires 11-5-59

10-30-57

PLUGGING
FILE SEC. 14 T. 28 R. 17 W
BOOK PAGE 51 LINE 26

ROTARY DRILLING LOG

OPERATOR: Sam Smith, Jr.
 Ross #1
 SE SE NE Sec. 14-28S-17W,
 Kiowa County, Kansas

CONTRACTOR: Prime Drilling Company
 COMM: 10/10/57
 COMP: 10/26/57

Remarks: Set 8-5/8" surface casing
 at 440' cemented with 300 sacks
 Pozmix, 2% C.C.

Formations:

Sand & Clay	74'
Sand	205'
Shale	320'
Sand	350'
Shale	440'
Red Bed	1095'
Anhydrite	1120'
Red Bed & Shale	1240'
Red bed, Shale & Shells	1635'
Shale & Shells	2195'
Lime & Shale	2365'
Lime	2750'
Lime & Shale	2845'
Lime	2950'
Shale & Lime	3400'
Lime & Shale	3770'
Lime	3965'
Lime & Shale	4100'
Lime	4125'
Shale & Lime	4217'
Lime	4695'
Lime & Shale	4742'
Lime, Chert & Shale	4772'
Chert & Shale	4778'
Chert & Lime	4802'
Chert	4810'
Chert & Cherty Lime	4831'
Chert & Lime	4832'
Rotary Total Depth (D&A)	4832'

We certify the above log is true
 and correct to the best of our
 knowledge and belief.

PRIME DRILLING COMPANY

R. R. McNicol

R. R. McNicol

RECEIVED
 OCT 30 1957
 OIL & GAS DIVISION
 WICHITA, KANSAS

PLUGGING
 FILE SEC. 14 T. 28 R. 17W
 BOOK PAGE 57 LINE 26