


15.159.06621.0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

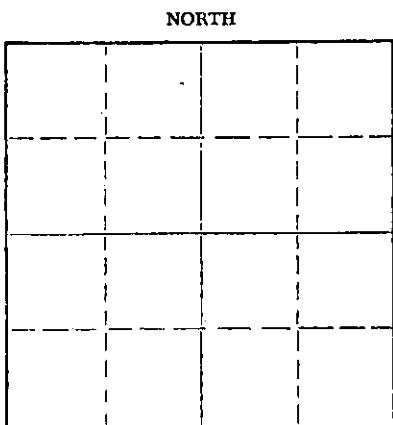

Rice County, Sec. 2 Twp. 21 Rge. 9E (W)
Location as "NE/CNW*SW*" or footage from lines SE SE NW
Lease Owner Thunderbird Drilling, Inc.
Lease Name Gillen #1 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 11/ 1/71 19
Plugging completed 11/ 5/71 19
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Toman
Producing formation Depth to top Bottom Total Depth of Well 3340 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	213	none
				5 1/2"	3333	2604'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

~~Checked hole to 3340'~~
Checked hole to 3340', ran sand to 3300' and dumped 5 sacks of cement.
Loaded hole, shot pipe at 2852', 2790', 2696', pressured up to 1600'
and couldn't break pressure down. Shot pipe at 2601', worked pipe
loose and pulled 81 joints. Bailed fluid down to 210' and set rock
bridge and dumped 25 sacks of cement. Mudded to 40' rock bridge and
ran 10 sacks of cement on top.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
NOV 11 1971
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 8th day of November, 1971

MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

Margaret Melcher
Notary Public.