

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Stafford County, Sec. 11 Twp. 21S Rge. 13 (E) X (W)

Location as "NE/CNW&SW&W" or footage from lines. NE SW NE

Lease Owner Davis and Reed

Lease Name NIXON Well No. 1

Office Address 645 Fourth Financial Center, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 5 19 75

Application for plugging filed November 5 19 75

Application for plugging approved November 5 19 75


Plugging commenced November 5 19 75

Plugging completed November 5 19 75

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

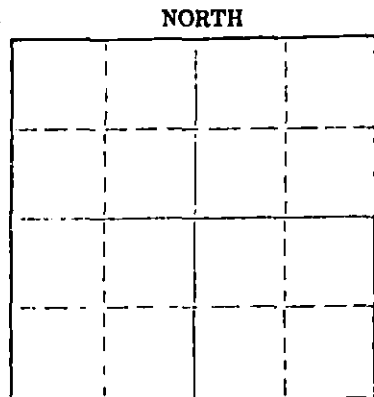

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3581 f.

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole full of heavy mud. 35 sacks spotted @ 300', mud to 40' w/1/2 sack hulls plug and 15 sacks cement. 2 sacks in rat hole.

Name of Plugging Contractor Duke Drilling Co. (If additional description is necessary, use BACK of this sheet)
Address Box 823, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON ss.
Larry Curtis (employee of owner) or (owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Larry Curtis
Box 823, Great Bend, Kansas

SUBSCRIBED AND SWORN TO before me this 6th day of November, 19 75

My commission expires April 11, 1978
Vereddy M. Hogue Notary Public.

STATE RECEIVED
NOV 7 1975
11-7-1975

DRILLERS' WELL LOG

DATE COMMENCED: October 30, 1975
DATE COMPLETED: November 5, 1975

Davis and Reed
NIXON # 1
NE SW NE
Sec 11-T21S-R13W
Stafford County, Kansas

ELEVATION: 1873 K.B.

0 - 216' Sand
216 - 321' Sand, Red Bed
321 - 708' Red Bed
708 - 733' Anhydrite
733 - 1545' Red Bed, Shale
1545 - 3130' Shale, Lime
3130 - 3134' Shale
3134 - 3147' Lime, Shale
3147 - 3165' Lime
3165 - 3256' Shale
3256 - 3531' Lime and Shale
3531 - 3581' Dolomite
3581' NTD

FORMATION TOPS

Anhydrite 708
Haebner 3130
Toronto 3147
Douglas 3165
Brown Lime 3256
Lansing K.O. 3270
Arbuckle 3531
NTD 3581

SURFACE PIPE: Set 321' of
8 5/8", 28#, w/225 sacks
50/50 Pozmix, 2% Gel, 3% cc.

AFFIDAVIT

STATE OF KANSAS }
COUNTY OF BARTON } ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 6th day of November, 1975.

Dorothy M. Hagne
Notary Public

My Commission Expires: April 11, 1976

RECEIVED
STATE OF KANSAS COMMISSION
NOV 7 1975
CONSERVATION DIVISION
Topeka, Kansas