

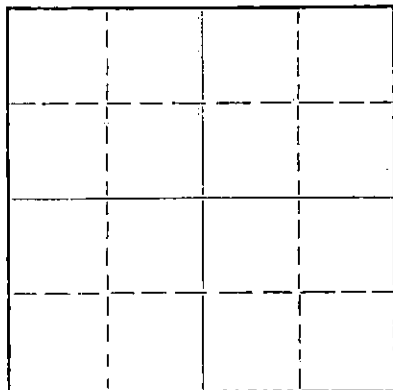
STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

Locate well correctly on above
Section Plat

Ellis County, Sec. 31 Twp. 13S Rge. (X) 16 (W)
Location as "NE/CNW/SW" or footage from lines NW NE NW
Lease Owner E. K. Edmiston
Lease Name Brungardt "C" Well No. 2
Office Address 425 First Natl Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed September 24, 19 67
Application for plugging filed September 26, 19 67
Application for plugging approved 19
Plugging commenced September 24, 19 67
Plugging completed September 24, 19 67
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3535 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe		~0~	160'	8-5/8"	9/16/67	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug set at 620 feet with 100 sacks cement;
Middle plug set at 160 feet with 25 sacks cement;
Top plug set at 40 feet with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

SEP 27 1967

9-27-67

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. K. Edmiston Drilling Co., Inc.
Address 425 First National Bank Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK
E. K. Edmiston

(Employee or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

425 First Natl Bank Bldg., Wichita, Ks.
(Address)

Subscribed and Sworn to before me this 26th day of September, 1967

My commission expires November 9, 1969

Marilyn E. Fox

Notary Public.

DRILLER'S LOG

COMPANY: E. K. Edmiston
425 First National Bank Building
Wichita, Kansas 67202

ROTARY DRILLING COMMENCED: September 16, 1967

ROTARY DRILLING COMPLETED: September 24, 1967

WELL NAME: BRUNGARDT "C" No. 2

LOCATION: NW NE NW Sec. 31-13S-16W
Ellis County, Kansas

CONTRACTOR: E. K. Edmiston Drilling Co., Inc.
425 First National Bank Building
Wichita, Kansas 67202

CASING RECORD: 160' of 8-5/8" with 125 sacks cement

L O G

Measurements from top of Kelly Bushing


Surface Clay and Shale	0 - 105
Shale and Clay	160
Shale and Red Bed	560
Shale	640
Sand	755
Red Bed	1110
Anhydrite Lime	1155
Shale and Shells	1684
Lime and Shale	1825
Lime	2363
Lime and Shale	3088
Lime	3535 R.T.D.

RECEIVED
STATE CORPORATION COMMISSION

SEP 27 1967

CONSERVATION DIVISION
Wichita, Kansas

The undersigned, E. K. Edmiston, President of E. K. Edmiston Drilling Co., Inc., hereby certifies on behalf of said company, that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the daily drilling reports.

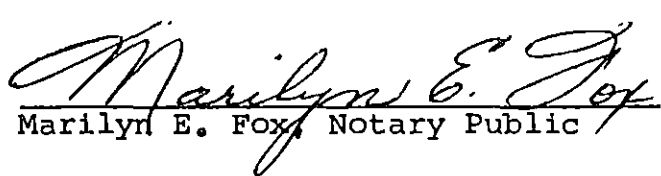

E. K. Edmiston

STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

BE IT REMEMBERED that on this 26th day of September, 1967, before me, the undersigned, a Notary Public within and for the County and State aforesaid, came E. K. Edmiston, known to me to be the same person who executed the foregoing instrument on behalf of E. K. Edmiston Drilling Co., Inc., and he duly acknowledged the execution of the same for himself and for said company.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

Commission Expires:
November 9, 1969


Marilyn E. Fox, Notary Public

