

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202


Stafford County, Sec. 31 Twp. 21 Rge. 12W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
NW SE SE

Lease Owner Energy Reserves Group, Inc.
Lease Name Curtis Well No. 1
Office Address 925 Patton Road, Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed 10/19/80 19
Application for plugging filed 10/19/80 19
Application for plugging approved 10/19/80 19
Plugging commenced 10/19/80 19
Plugging completed 10/19/80 3 P.M. 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations. RTD 3759'

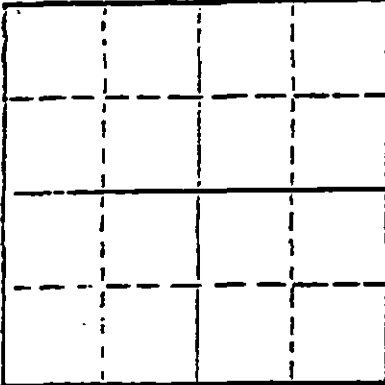

Locate well correctly on above
Section Map

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	692	8-5/8"	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug @ 690 with 50 sacks
2nd plug @ 40' with 10 sacks
10 sacks in rathole
Job complete @ 3 p.m. 10/19/80

RECEIVED
STATE CORPORATION COMMISSION
NOV 4 1980
11-4-80
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.


(employee of owner) or (owner or operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg
200 Douglas Building, Wichita 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 3 day of November, 19 80

Mary Lou Taylor
Mary Lou Taylor Notary Public.

commission expires January 17, 1981



DRILLERS LOG

OPERATOR: Energy Reserves Group, Inc.
925 Patton Road
Gt. Bend, Kansas 67530

WELL NAME: Curtis #1
NW SE SE Sec.31-21S-12W
Stafford County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
200 Douglas Building
Wichita, Kansas 67202

COMMENCED: 10/10/80

COMPLETED: 10/19/80

RTD: 3759'

SURFACE CASING: 8-5/8" set at 692 with 450 sx cement

0' to 675' Sand & Shale
675' to 702' Anhydrite
702' to 990' Shale & Shells
990' to 1670' Shale & Lime
1680' to 1880' Shale & Sand
1880' to 2150' Lime & Shale
2150' to 2625' Shale & Lime
2625' to 3065' Lime & Shale
3065' to 3225' Shale & Lime
3225' to 3320' Im & Shale
3320' to 3358' Lime
3358' to 3384' K.C.
3384' to 3487' Lime
3487' to 3505' Lime & Shale
3505' to 3640' Lime
3640' to 3648' Arbuckle
3648' to 3759' Lime Arbuckle
RTD 3759'

RECEIVED
STATE CORPORATION COMMISSION
NOV - 4 1980
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc.
hereby state the above is an accurate copy of the Curtis #1 log for
Energy Reserves Group, Inc.

James C. Remsberg
James C. Remsberg

Subscribed and sworn to me this
3rd day of November, 1980

Mary Lou Taylor
Mary Lou Taylor, Notary

My commission expires January 17, 1981

