


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
806 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD Strike out upper line when reporting plugging off formations.

Stafford County, Sec. 26 Twp. 21 Rge. (E) 13 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines C NE NE SE 1/4
Lease Owner M. B. Armer
Lease Name Batman Well No. 1
Office Address 306 Insurance Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry
Date well completed 11/25 19 48
Application for plugging filed 11/25 19 48
Application for plugging approved 11/25 19 48
Plugging commenced 11/25 19 48
Plugging completed 11/25 19 48
Reason for abandonment of well or producing formation dry

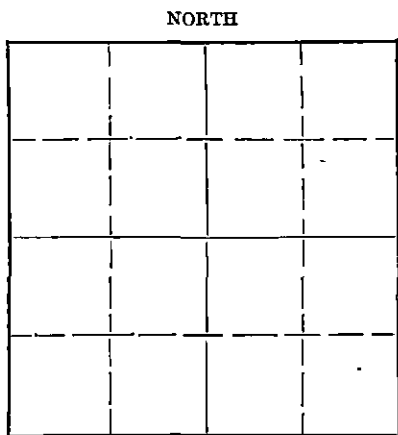

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Depth to top Bottom Total Depth of Well 3702 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Chert Viola	dry	3666	3702	8-5/8	240'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 240' - 15 sack cement. Mud to top - 10 sack cement

RECEIVED
12-1-48
DEC-1 1948
STATE CORPORATION COMMISSION
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to M. B. Armer
Address 306 Insurance Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
M. B. Armer

(Employee or owner or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. B. Armer

306 Insurance Building, Wichita 2, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 29th day of November, 1948.

Hayl Swarton
Notary Public.

My commission expires Sept. 17, 1951.

PLUGGING FILE SEC 26 TWP 21 R 13W PAGE 70 LINE 38

Company: M. B. Armer
 Contractor: Armer Drilling Company, Inc.
 Date Commenced: 11/10/48
 Date Completed: 11/25/48
 Elevation: 1872 D. F.
 Rig #1

Farm: Batman #1
 Location: C NE NE SE $\frac{1}{4}$ Sec. 26-21S-13W
 Stafford County, Kansas
 Casing Record: 240' of 8-5/8",
 cemented w/200 sacks

(figures below indicate bottoms)

Sand & shale	210	
Shale & shells	218	
Shale & shells & red rock	670	
Red bed & shale	770	
Sand	800	
Shale & shells	1270	
Shale, shells & salt	1455	
Shale & shells	1570	
Lime & shale	2330	
Shale & shells	2625	
Shale & lime	3020	
Broken lime	3100	
Lime	3240	
Lime & shale	3310	
Lime, broken	3369	
Lime	3552	
Viola lime	3554	
Lime	3624	
Red shale	3664	
Chert	3676	
Chert & lime	3702	D & A
	- Total Depth	3702

I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

ARMER DRILLING COMPANY, INC.

By

M. B. Armer

RECEIVED
 CONSERVED
 DEC - 1 1948
 STATE CORPORATION
 COMMISSION
 KANSAS

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a notary public, in and for said County and State this 29th day of November, 1948.

Had. Walton
 Notary Public.

My commission expires Sept. 17, 1951

PLUGGING
 FILE SEC 26 T 21 R 3W
 BOOK PAGE 70 LINE 38