

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD


4

Strike out upper line
when reporting plug-
ging off formations.

Finney

County. Sec. 26 Twp. 21 Rge. 24 (E) W (W)

NORTH

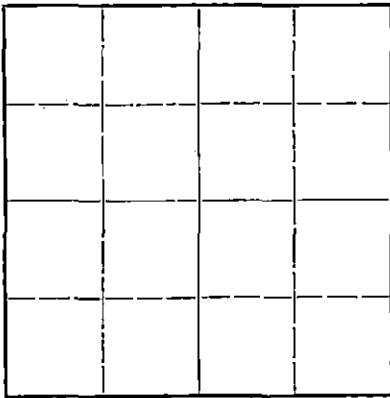

Locate well correctly on above
Section Flat

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines.
Lease Owner. Black & Marshall
Lease Name. Maune - Edith
Office Address. Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole
Date well completed Jan. 24 19. 45
Application for plugging filed Jan. 26 19. 45
Application for plugging approved January 27 19. 45
Plugging commenced Feb. 2 19. 45
Plugging completed Feb. 10 19. 45
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production. No Production 19.

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. Mr. Kerr
Producing formation. Mississippi Lime Depth to top. 4595 Bottom. 4750 Total Depth of Well 4750 Feet
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lancing		3864	4159	10 $\frac{3}{4}$ in.	240'	0
Mississippi		4595	4750	5 $\frac{1}{2}$ " O. D.	4600'	1533

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Ran 15 sacks cement with Hinderliter dump boiler dumped on bottom. Mudded hole to bottom of surface pipe 240'. Put 10 sacks cement in bottom of surface pipe and mudded hole to 15' of surface and ran 10 sacks cement.

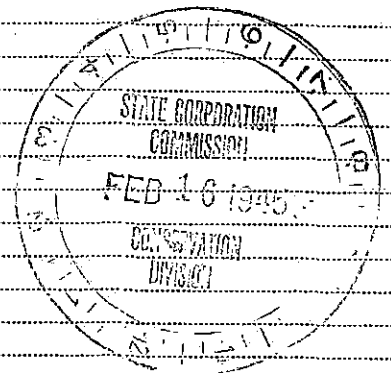

2-16-45

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to
Address.

STATE OF Kansas COUNTY OF Barton, ss.
H. M. Herbert (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. M. Herbert
Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 14th day of February, 1945

My commission expires January 15, 1947

Geneva Martin Weaver
Notary Public.

COMPANY: Black-Marshall Oil Company
 CONTRACTOR: Ferrell-Young Drilling Company
 FARM: Edith Maune #2

LOCATION: C NE SW
 Sec. 26-21S-34W
 Finney County, Ks.

COMMENCED: November 5, 1944
 COMPLETED: December 3, 1944

CASING RECORD:
 246.55' - 10 $\frac{3}{4}$ " - 200 sack
 cement


ELEVATION: 2939'

FORMATION DEPTH

Cellar	4
Sand, Shale & Shells	316
Shale & Shells	500
Shale, Shells & Red Rock	1140
Red Rock & Shells	1400
Anhydrite	1455
Shale & Shells	2075
Lime	2190
Lime & Shale Bks.	2485
Lime & Shale	2600
Lime & Shale Bks.	2700
Lime & Shale	2800
Lime	2850
Lime & Shale Bks.	2935
Lime	2995
Lime & Shale Bks.	3055
Lime & Shale	3080
Lime	3170
Lime & Chert	3225
Lime & Shale	3340
Lime	3370
Lime & Shale Bks.	3525
Shale & Shells	3645
Lime	3715
Shale & Shells	3790
Lime & Shale	3834
Lime	4215
Cherty Lime	4245
Lime	4280
Lime & Shale	4355
Lime & Shale Bks.	4390
Lime & Shale	4470
Lime, Shale & Chert	4520
Lime, Shale & Shells	4550
Lime & Shale	4570
Shale, Lime & Chert	4595
Lime	4605
Total Rotary Measurement	4605

TOPS: (Rotary Measurements)

Anhydrite	1455
Lansing K.C.	3864
Mississippian	4595

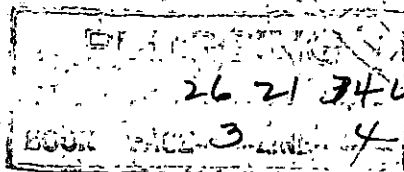

I hereby certify this to be a correct and accurate log of the above described well as shown by the drilling reports.

FERRELL-YOUNG DRILLING COMPANY

By

James J. Huff

1944.

Subscribed and sworn to before me this 29th day of December,

Geneva Martin Weaver

My commission expires: January 15, 1947.