

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Trego

County. Sec. 1 Twp 12 Rge 22 ~~XX~~ (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines 330' fr. N. Line, 660' fr. W. Line
in NE 1/4

Lease Owner Wm. McKnab

Lease Name James Krysl

Well No. 1

Office Address Winfield, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date, well completed May 10, 1941

Application for plugging filed May 16, 1941

Application for plugging approved May 16, 1941

Plugging Commenced May 17, 1941

Plugging Completed May 20, 1941

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander

Producing formation None Depth to top Bottom Total Depth of Well 4052 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS



CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
K.C.	Water	3842	3856	5 1/2"		
Marmonton	Slight Show	3943	3981			
Arbuckle	Water	4043	4072	"	4043	2900

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud from 3998' to 3943' followed by 3' wood plug., Cement to 3928' and mud to 3843' followed by 3' wood plug., Cement to 3828' and mud to 250', then 8' permanent wood plug, then cement to 235' and mud to 14', then 3' wood plug, and cement to level of top of surface pipe.

20 sacks of cement used
Mud introduced into hole by dump bailer.

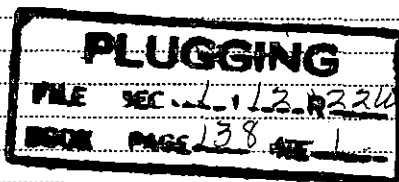

5-22-41

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Wm. McKnab

Address Winfield, Kansas

STATE OF Kansas COUNTY OF Ellis ss.

C. C. Linscomb--Operator

Operator of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. C. Linscomb

C. C. Linscomb

Ellis, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of May, 1941

My commission expires Jan. 15, 1944

Notary Public.