


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Ellis County, Sec. 21 Twp. 13S Rge. (E) 20 (W)

Location as "NE/CNW/SW" or footage from lines SE SE SW
Lease Owner Gulf Oil Corporation
Lease Name D. A. Schumacher Well No. 1
Office Address Box 661, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 2-6-19 55
Application for plugging filed 2-9-19 55
Application for plugging approved 2-11-19 55
Plugging commenced 2-14-19 55
Plugging completed 2-19-19 55
Reason for abandonment of well or producing formation Dry Hole

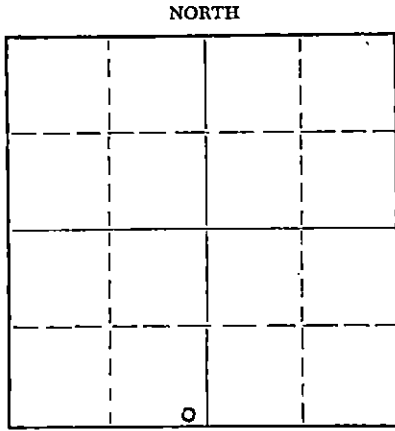

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Arbuckle Depth to top 3857' Bottom 3862' Total Depth of Well 3862' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 - 5/8"	1566'	None
				5 - 1/2"	3854'	3196'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Plugged back from 3859' to 3811' with 6 sack cement. Mudded hole to 300'. Set rock bridge and dumped 15 sack cement. Mudded to 30' of surface and capped with 10 sack cement, filling hole into cellar. Casing was ripped at 3240' - could not pull. Ripped at 3180' and pulled. Recovered 3196' of 5 - 1/2" casing.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor C. E. Shull Casing Pulling Company
Address Great Bend, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
W. H. Duley (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. H. Duley
Box 544, Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 1955

My commission expires April 17, 1956
Notary Public.

PLUGGING
FILE SEC 21 T 13 R 20W
BOOK PAGE 96 LINE 29

2-24-55 FEB 24 1955
CONSERVATION DIVISION
Wichita, Kansas

