

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

McPherson County, Sec. 17 Twp. 21S Rge. 1 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW SE NW

Lease Owner Tom Kat, Inc.

Lease Name Chavez Well No. 5

Office Address 1125 Wichita Plaza, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed 9/25 19 65

Application for plugging filed 19

Application for plugging approved 19

Plugging commenced 9/25 19 65


Plugging completed 9/25 19 65

Reason for abandonment of well or producing formation No commercial

quantities of oil or gas encountered.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

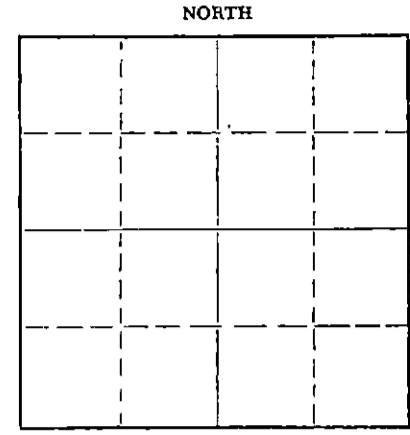

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert J. Toman, Holyrood, Kansas

Producing formation None Depth to top Bottom Total Depth of Well 3425 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface				8 5/8"	172'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud was put into the hole to a depth of 165 feet, where the bottom plug was set and cemented with 20 sacks of cement. Mud was then put into the hole to a depth of 40 feet, where the second plug was set and cemented with 10 sacks of cement. Two sacks of cement were used in the rathole.

Surface casing was cut off below ground level and the location abandoned.

RECEIVED
STATE CORPORATION COMMISSION
OCT 4 1965
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Tom Kat, Inc.
Address 1125 Wichita Plaza, Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Richard C. Davis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
1125 Wichita Plaza, Wichita, Kans.
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of September, 19 65

My commission expires January 19, 1969
Esther Lamone Notary Public.

DRILLERS LOG

5 CHAVEZ

TOM KAT, INC.

NW SE NW, SEC. 17-21S-1W

McPHERSON COUNTY, KANSAS

Commenced: 9/16/65

Completed: 9/25/65

Elevation: 1502 KB

<u>From</u>	<u>To</u>	<u>Description</u>	<u>Remarks</u>
0	150	Clay, Sand, Shale	Set 172' 8 5/8" surface casing
150	172	Shale	with 135 sacks Sunset cement.
172	250	Post Rock & Shale	
250	1088	Lime & Shale	<u>Tops:</u>
1088	1175	Shale	
1175	2032	Shale w/Lime streaks	Lansing 2330 - 828
2032	2340	Lime & Shale	Mississippian 2950 -1448
2340	2495	Lime	Kinderhook 3265 -1763
2495	2587	Lime & Shale	Misner 3365 -1863
2587	2841	Lime	Hunton 3369 -1867
2841	2930	Lime & Shale	Rotary Total Depth 3425 -1923
2930	2980	Shale	
2980	3040	Mississippian	
3040	3050	Mississippian	
3050	3070	Lime	
3070	3350	Shale & Lime	
3425		Rotary Total Depth	

RECEIVED
STATE CORPORATION COMMISSION

OCT 4 1965

CONSERVATION DIVISION
Wichita, Kansas

I certify to the best of my knowledge and belief, the above represents a true and accurate driller's log record of the captioned well.



Richard C. Davis

STATE OF KANSAS

SS

COUNTY OF SEDGWICK

Subscribed and sworn to before me this 29th day of September, 1965.


Esther Lamone, Notary Public

My Commission Expires: January 19, 1969