


R

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

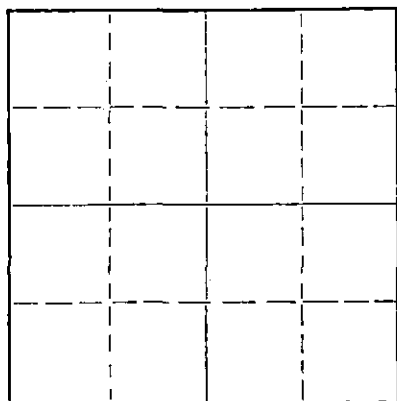

Locate well correctly on above
Section Plat

Mc Pherson County. Sec. 17 Twp. 21 Rge. 1 W (E) (W)
Location as "NE/CNW%SW%" or footage from lines NW/ NE/ SE
Lease Owner Alfred Koehn
Lease Name Goaring Well No. 9
Office Address Galva, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 6 -13 1937
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced Oct 1961
Plugging completed Oct 24 1961
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Cecil Jones
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3319' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
					7"	1350'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom of hole with rock. Rock from 3332' to 3304'. Dumped 7 sx of cement. Mudded hole. Finished mudding hole to 160'. Set 10' of rock bridge. Dumped 3 1/2 yds. of Ready-Mix cement, filling to the bottom of the cellar.

RECEIVED
STATE CORPORATION COMMISSION
NOV 9 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address P.O. Box 983 Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Reno, ss.
Mrs. Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Mrs. Art Lamb
P.O. Box 983 Hutchinson, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 8 day of November, 1961

My commission expires 1/16/65
Gerald R. Murray Notary Public.


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY.
412 Union National Bank Bldg, Wichita, Kansas.

THE DICKEY OIL CO.
Cooring No. 9

SEC. 17 T. 21 R. 1W.
NW NE SE

Total Depth. 3332
Comm. 5-23-37 Comp. 6-13-37
Shot or Treated.
Contractor. *The ... in Sum, Jan*
Issued. 8-14-37

County McPherson.



CASING.

10" 120'
7" 3319'

Elevation. 1489
- 1830

Production. Pot. 525 B.

Figures Indicate Bottom of Formations.

surface	160
shale shells	538
broken lime	780
lime	795
broken lime	956
shale and shells	1404
shale	1506
broken lime	1554
shale and shells	1747
shale	1827
broken lime	1967
lime	2024
broken lime	2326
lime	2632
shale	2738
shale and shells	2795
shale	2918
chat	3065
lime	3104
shale	3319
Top Hunton line	3319
sdv lime	3332
Total Depth.	

Top of Hunton = 319

*1489
1570*