

15.145.00799.0000

RECEIVED  
STATE CORPORATION COMMISSION


APR 2 - 1974

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Maps Required Attached  
Mail or Deliver Report to  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217

WELL PLUGGING RECORD

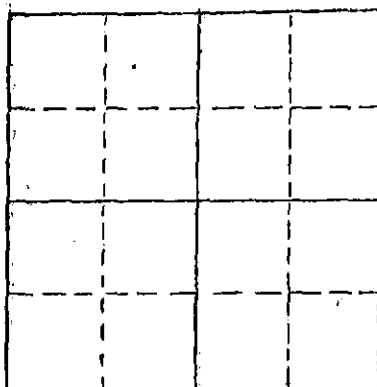

Locate well correctly on above  
Section Plat

Pawnee County, Sec. 34 Twp. 21 Rge. 16 (E) (W) X  
Location as "NE/CNW/SE/SW" or footage from lines S/2 NW NW  
Lease Owner A. L. Abercrombie, Inc.  
Lease Name Wieman Well No. #4  
Office Address 801 Union Center Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 10  
Application for plugging filed 10  
Application for plugging approved 10  
Plugging commenced 3-21-74 10  
Plugging completed 3-25-74 10  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 10  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3945' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3844'	3039.19'
				8 5/8"	992'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Made bottom hole plug back with sand to 3800'. Mixed and dumped 4 sacks cement thru dumpbailer.  
Bridge hole 425' - 375'. Filled hole with 5 yards ready mix concrete.

Name of Plugging Contractor, Southwest Casing Pulling Co. (If additional description is necessary, use BACK of this sheet)  
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364 Great Bend, Kansas  
(Address)



Signed and sworn to before me this 1 day of April 1974  
Notary Public.

CONTRACTOR'S WELL LOG

COMPANY: Musgrove Petroleum Corporation  
 CONTRACTOR: Musgrove Petroleum Corporation  
 FARM: Weiman #4  
 LOCATION: C of S/2 NW NW, Sec. 34-21-16  
 Pawnee County, Kansas.  
 COMMENCED: September 16, 1953  
 COMPLETED: September 26, 1953

0	80	Sand
80	150	Sand & shale
150	420	Blue shale & shells
420	540	Sand & shells
540	878	Red bed & shale
878	1000	Anhydrite
1000	1855	Shale & shells
1855	1990	Shale
1990	3190	Lime & shale
3190	3843	Lime
3843	3845	Arbuckle
	3845	Rotary Total Depth

RECEIVED  
 STATE CORPORATION COMMISSION  
 NOV 2 1973  
 CONSERVATION DIVISION  
 Wichita, Kansas

Set 8-5/8" surface casing at 982' with 450 sacks Posmix cement.

Set 5-1/2" casing at 3844' with 150 sacks cement.

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )

I, GORDON L. KOELLING, do hereby certify that the above and foregoing is a true and correct copy of the log of the Weiman #4, Center S/2 NW NW, section 34-21-16, Pawnee County, Kansas, as reflected by the files of the Musgrove Petroleum Corporation.

MUSGROVE PETROLEUM CORPORATION

By Gordon L. Koelling  
 Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public in and for Sedgwick County, Kansas, this first day of October, 1953.

Alma E. Ross  
 Notary Public

My commission expires July 16, 1955.