


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas.

R

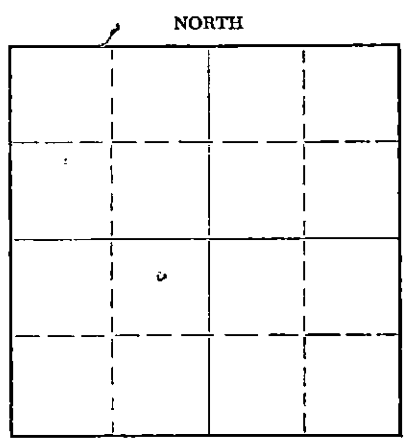

Locate well correctly on above
Section Plat

McPHERSON County, Sec 35 Twp 21 Rge 3 (~~E~~-~~W~~) (W)
Location as "NE/CNWSW4" or footage from lines CN/2 SE SW
Lease Owner E. K. CAREY, CONTRACTOR
Lease Name KREBBEL Well No. 2
Office Address BOX 620, MCPHERSON, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed 9-19-56 19
Application for plugging filed 12-15-60 19
Application for plugging approved 12-30-60 19
Plugging commenced January 28 19 61
Plugging completed February 14 19 61
Reason for abandonment of well or producing formation DRY

If a producing well is abandoned, date of last production 12-14-60 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Cecil Jones
Producing formation NEOLA, HUNTON, Depth to top 3552 Bottom _____ Total Depth of Well 3557 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	243	NONE.
				5 1/2	3553	3093

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled back to 3540'. Dumped 5 sacks of cement. Shot pipe off at 3093'. Pulled pipe and mudded hole to 200'. Set rock bridge and dumped 20 sacks of cement. Finished mudding hole and dumped 10 sacks of cement at base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
FEB 17 1961
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor _____
Address _____
(If additional description is necessary, use BACK of this sheet)

STATE OF Kans. COUNTY OF Reno, ss.
Employee (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Deit Seely
R. R. #1, Hutchinson, Kans.
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 19 61

My commission expires August 12, 1961
Norothy Seely Notary Public.

E. K. Carey, Contractor
 Box 620
 McPherson, Kansas

Elevations: 1460 K.B.
 1458 D.F.
 1454 Gr.

Krehbiel #2

8-5/8" X 5 1/2" Head 6.60'
 below K. B.

C N/2 SE SW
 Sec. 35-21-3W
 McPherson, County, Kansas

Casing Record:

Well Commenced: 8-23-56
 Well Completed: 9-4-56

8-5/8" CSA 243' w/125 sks
 Pozmix cement & 200# CC

5 1/2" CSA 3553' w/70 sks
 Pozmix cement

Contractor: E. K. Carey Contractor, Rig #2, Box 620, McPherson, Kansas
 Geologist: Don Hollar, E. K. Carey Drilg. Co., S15 Central Bldg. Wichita

Figures Indicate Bottom of Formations K.B.

Cellar	7
Clay & shale	40
Sand	110
Shale	175
Shale & Lime & shells	220
Shale & shells	243
Lime & shale	1230
Shale & lime	1850
Lime	1960
Lime & shale	2135
Shale & lime	2215
Sand & shale	2366
Lime	2405
Shale & lime	2457
Lime	2695
Lime & shale	3090
Shale & lime	3134
Miss. lime	3449
Shale & lime	3484
Shale	3548
Misner sand	3552
Hunton lime	3557 TD

Geologist Tops:

Mississippi	3134
Misner Sand	3548
Hunton	3552

Rotary Total Depth 3557

Set 5 1/2" csg. 3553' or 4' off bottom

DST #1 - 3551 to 3557 or 6' of anchor.
 Total open 30 min., opened with a
 weak blow, Ried in 25 min. Closed 20
 min. for BHP. Recovered 15' of drilg.
 mud with very few spots of oil.
 BHP 472#

This is to certify that the above information is to the best of my
 knowledge true and correct.

SUBSCRIBED AND SWORN to before me this 5th day of September, 1956

E. K. CAREY CONTRACTOR

BY Herbert Rhoton
 Herbert Rhoton, Superintendent

[Signature]
 NP

My Commission Expires: November 13, 1956