

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Stafford County. Sec. 3 Twp. 21 Rge. 11 (E) (W)

Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines C-E/2 SE NW

Lease Owner Leben Drilling, Inc.

Lease Name SNIDER Well No. 1

Office Address 505 Orpheum Bldg, Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed February 17 19 56

Application for plugging filed 2-17 19 56

Application for plugging approved 2-17 19 56


Plugging commenced 2-17 19 56

Plugging completed 2-17 19 56

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

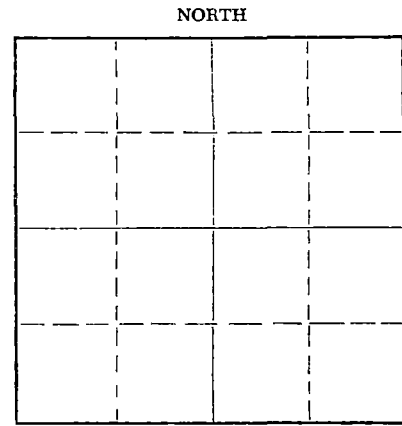

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well S. S. Greider

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3400 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	255.87'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plug w/  $\frac{1}{2}$  sk hulls, 15 sks cement,  
Mud to 40 ft. Plug w/  $\frac{1}{2}$  sk hulls,  
10 sks cement to surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling Company

Address 505 Orpheum Bldg, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

James M. Battin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James M. Battin

Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of February, 19 56

My commission expires April 20, 1959

Kenneth D. Lusk  
Notary Public.

**PLUGGING**  
FILE SEC 3721 R 11W  
BOOK PAGE 3742 LINE 23

2-23-56

CONTRACTOR'S WELL LOG

15.185.12088.0000

COMPANY:  
CONTRACTOR:  
FARM:  
LOCATION:

Leben Drilling, Inc.  
Leben Drilling, Inc.  
Snider No. 1  
C-E/2 SE NW Sec. 3-21-11  
Stafford County, Kansas  
January 31, 1956  
February 17, 1956

COMMENCED:  
COMPLETED:

0	30	Surface Clay
30	257	Sand and Redbed
257	370	Redbed
370	490	Shale, shells
490	515	Anhydrite
515	800	Shale, shells
800	1100	Shale, salt
1100	1325	Shale, shells
1325	1585	Shale, lime
1585	2096	Lime, shale
2096	2245	Shale, lime
2245	2410	Shale, shells
2410	2680	Shale, lime
2680	2780	Lime
2780	2885	Lime, shale
2885	3072	Shale, lime
3072	3100	Lantz
3100	3150	Lime
3150	3275	Lime, shale
3275	3335	Lime
3335	3400	Conglomerate
		Rotary Total Depth, D & A

Set 264.87 feet of 8 5/8" surface casing @ 255.87 feet w/175 sacks cement.

I, James M. Battin, do hereby certify that the above and foregoing is a true and correct copy of the log of the Snider No. 1, C-E/2 SE NW Sec. 3-21-11, Stafford County, Kansas as reflected by the files of Leben Drilling, Inc.

LEBEN DRILLING, INC.

BY: James M. Battin

STATE OF KANSAS )  
COUNTY OF SEDGWICK ) SS

Subscribed and sworn to before me, a Notary Public, inland for Sedgwick County, Kansas, this 22nd day of February, 1956.

Norma D. Sisson  
Notary Public

My commission expires April 20, 1959

**PLUGGING**  
ALL SEC. 3-21-11w  
BOOK PAGE 40 LINE 23  
39