


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Stafford County, Sec. 20 Twp. 21 Rge. 12 (E) W (W)

Location as "NE/CNW*SW*" or footage from lines S/2 SW
Lease Owner The National Supply Company
Lease Name Lucy Walters Well No. 1
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 11-10-61 _____ 19____
Plugging completed 11-14-61 _____ 19____
Reason for abandonment of well or producing formation Depleted.

NORTH



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Bill Lackamp
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3594 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	300'	None
				7"	3588'	1803'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3594', ran 5 tubs of sand to 3550' and dumped 5 sacks of cement @ 3550' with dump bailer. Pulled 7" casing. Bailed hole to 275', set 10' rock bridge to 265' and ran 20 sacks of cement @ 265'. Mudded hole to 25', set rock bridge and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECORDED
INDEXED
SERIALIZED

DEC 4 1961

12-4-61

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of November, 1961

Melton J. Volin
Notary Public.

My commission expires May 20, 1964



STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 20 Twp. 21 Rge. 12 (E) W (W)

Location as "NE/CNW&SW" or footage from lines S/2 SW
Lease Owner The National Supply Company
Lease Name Lucy Walters Well No. 1
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 11-10-61 _____ 19____
Plugging completed 11-14-61 _____ 19____
Reason for abandonment of well or producing formation Depleted.

NORTH

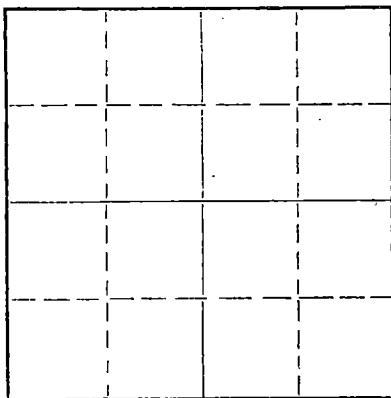

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Bill LacKamp
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3594 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	300'	None
				7"	3588'	1803'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3594', ran 5 tubs of sand to 3550' and dumped 5 sacks of cement @ 3550' with dump bailer. Pulled 7" casing. Bailed hole to 275', set 10' rock bridge to 265' and ran 20 sacks of cement @ 265'. Mudded hole to 25', set rock bridge and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

DEC 4 1961

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (~~wyner or operator~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of November, 1961

My commission expires May 20, 1964

Milton J. Volian
Notary Public.



W E L L R E C O R D

CORPORATION COMMISSION OF KANSAS

PRODUCER: MIDSTATES OIL CORPORATION
 STREET 515 Nat'l Bank of Tulsa CITY Tulsa STATE Oklahoma
 LEASE LUCK WALTER WELL NO. 1
 COUNTY Stafford SEC. 20 TWP. 21S RGE. 12W
 DRILLING STARTED January 17, 1945 DRILLING COMPLETED Feb. 15, 1945
 INITIAL PRODUCTION OF OIL: Pumped 373 barrels in 24 hours, no water.

CASING RECORD

Size	Where Landed	No. of Sacks Cement
10-3/4"	300'	300
7"	3583'	300
2-3/8"	3587'	

FORMATION RECORD

FORMATION	TOP	BOTTOM
Sand	0	60
Shale	60	120
Sand	120	235
Shale	235	285
Redbed	285	300
Red shale	300	515
Shale and shells	515	1525
Line and shale	1525	1555
Line	1555	1880
Sand	1880	1905
Line	1905	2250
Line and shale	2250	2300
Line	2300	2435
Line and shale	2435	2520
Shale and line	2520	2600
Shale and shells	2600	2650
Line	2650	2785
Line and shale	2785	2915
Line	2915	3195
Shale and shells	3195	3255
Line	3255	3540
Shale	3540	3575
Line	3575	3594

DESCRIPTION OF PROPERTY

660 ft. from West Line and 330 ft. from South Line of the SW 1/4 of Section 20-21E-12W

RECEIVED
 STATE CORPORATION COMMISSION

NOV 7 1945

CONSERVATION DIVISION
 Wichita, Kansas

Handwritten notes:
 660 ft. from West Line
 330 ft. from South Line
 of the SW 1/4 of
 Section 20-21E-12W
 Total depth 3594 ft.

Signed F. L. Madaniels
 F. L. Madaniels, General Super-
 intendent

Date April 25, 1945