

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-159-05460-00-00
Spot: CNENWNW Sec/Twnshp/Rge: 16-21S-7W
4950 feet from S Section Line, 4290 feet from E Section Line
Lease/Unit Name: PATTON Well Number: 3
County: RICE Total Vertical Depth: 3375 feet

Operator License No.: 7775
Op Name: WILTON PETROLEUM, INC.
Address: 901 KING AVE.
NYSSA, OR 97913

Conductor Pipe: Size feet: 109.69
Surface Casing: Size 10.75 feet: 103 100 SX CMT
Production: Size 7 feet: 3355 150 SX CMT
Liner: Size feet:

Well Type: OIL UIC Docket No: Date/Time to Plug: 02/01/2002 9:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JOE MAES Company: QUALITY WELL SERVICE Phone:

Proposed
Plugging
Method:

Sand to 3341 and 7sxs. 50sxs-1050'. 50sxs-625'. 250'-0'.

Plugging Proposal Received By: JACK LUTHI Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 02/01/2002 1:00 PM KCC Agent: JACK LUTHI

Actual Plugging Report:

Sanded bottom to 3341' and 7sxs of common. Shot 7" off at 1420'. Pulled to 1050'. Pumped 50sxs. Pulled to 625' and pumped 50sxs, pulled to 200' circulated cement to surface.

RECEIVED
KCC DISTRICT #2

FEB 06 2002

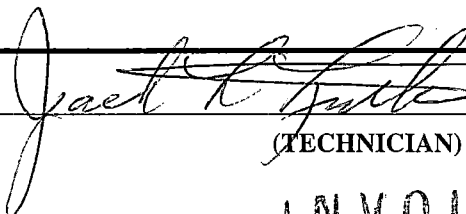
WICHITA, KS

Remarks: ALLIED # 7530, 60/40 POZ, 4% GEL. CEMENT FELL AT 60'. PUMPED CEMENT TO SURFACE.

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

INVOICED

Form CP-2/3

DATE Feb 7-02

INV. NO. 1002061351