


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

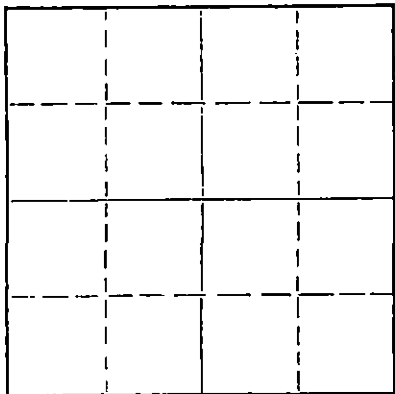

Locate well correctly on above
Section Plot

Ness County, Sec. 6 Twp. 20S Rge. 24 (W)
C SW SE
Location as "NE/CNW/SW" or footage from lines
Lease Owner Pickrell Drilling Company
Lease Name Betz "D" Well No. 1
Office Address 705 Fourth National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 18, 1970
Application for plugging filed February 18, 1970
Application for plugging approved February 18, 1970
Plugging commenced February 18, 1970
Plugging completed February 18, 1970
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 1400 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	260'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Top Plug @ 600' w/70 sacks, Plug @ 240' w/20 sacks,
Bottom Plug @ 40' w/10 sacks.


3-4-70
RECEIVED
STATE CORPORATION COMMISSION
MAP 4 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Building, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
C. W. Sebitts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
705 Fourth National Bank Bldg., Wichita, Kansas
(Address)

Subscribed and sworn to before me this 25th day of February, 1970
Esther Lamone
Esther Lamone Notary Public.



ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company
705 Fourth National Bank Building
Wichita, Kansas 67202

Rotary Drilling Commenced 2/7/70

Rotary Drilling Completed 2/18/70

LOCATION: Betz "D" No. 1, C SW SE Section 6-20S-24W,
Ness County, Kansas

CONTRACTOR: PICKRELL DRILLING COMPANY
Wichita, Kansas

CASING RECORD: Run 12 Jts. 28# 8-5/8" surface casing set @ 260' KB. Cemented with 165 Sacks. Completed 6:15 PM. Circulated.

No oil string run. D & A, Plugged 6:45 AM February 18, 1970.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

60	Post Rock		C.F.S.
130	Shale - Shells		4290
260	Shale & Shells		4345
590	Shale & Sand		4365
930	Shale - Shells		4374
955	Blain		4390
1040	Shale - Shells - Red Beds		4400
1235	Sand		
1559	Shale & Shells		
1570	Anhydrite		S.L.M.
1800	Shale & Shells	Board	3438.45
2275	Shale & Lime Streaks	Strap	3438.00
2895	Lime		.45 Lcng
3095	Lime & Shale		
3745	Shale & Lime		Slope Tests
4220	Lime		2000
4275	Lime & Shale		2500
4305	Lime		3000
4345	Lime & Conglomerate		3500
4365	Lime		4000
4374	Miss. Lime		
4390	Lime		
4400	Miss. - Lime - RTD		

RECEIVED
STATE CORPORATION COMMISSION
MAR 4 1970
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY


By C. W. Sebitts Attorney-in-Fact

STATE OF KANSAS
COUNTY OF SEDGWICK

On this 25th day of February, 19 70, before me the undersigned, a Notary Public, in and for

the State aforesaid, personally appeared C. W. Sebitts, to me known to be the person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact, and acknowledged to me that he executed the same as his free and voluntary act and deed, and that he is the duly authorized agent of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.



January 19, 1973

Esther Lamone
Esther Lamone Notary Public