


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

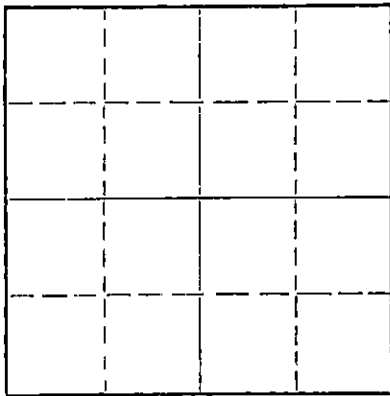

Locate well correctly on above
Section Plat

Ness County. Sec. 35 Twp. 20 Rge. 26 (E) (W) X

Location as "NE/CNW/SW" or footage from lines SW NE

Lease Owner Mull Drilling Company, Inc.

Lease Name Goodman

Well No. 2 SWD

Office Address P. O. Box 349 Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 10-8-69 19

Application for plugging approved 10-9-69 19

Plugging commenced 10-15-69 19

Plugging completed 10-15-69 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey

Producing formation Depth to top Bottom Total Depth of Well 4442 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	354	None
				5 1/2	None	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged well. Squeezed well with 5 sacks of hulls and 100 sacks of 6% pozmix cement.

RECEIVED
STATE CORPORATION COMMISSION
OCT 27 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

James W. Rockhold
P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22 day of October 19 69

(Signature) [Signature]

My commission expires May 27, 1973

Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock,
Wichita, Kansas


COPY

Company- MULL DRILLING, CO. INC,
Farm- Goodman No. 2

SEC. 35 T. 20 R. 26W
C SW NE

Total Depth. 4442'
Comm. 6-3-63 Comp. 6-15-63
Shot or Treated.
Contractor. Mull Drilling Co.
Issued. 9-28-63

County Ness
KANSAS



CASING:
8 5/8" 354' cem w/ 200 sx

Elevation. 2437' RB

Production. Dry

Figures Indicate Bottom of Formations.

surface soil	20
clay & sand	60
blue shale	355
shale & clay	415
shale & sand	1030
shale, etc..	1680
anhydrite	1720
shale	2145
lime w/shale	2927
sandy lime w/ shale	3095
shale & lime	3340
sandy lime & shale	3445
shale w/ lime	3567
chalky lime w/ shale	3750
lime w/ shale	4410
Mississippi	4415
conglomerate	4432
Mississippi	4442
Total Depth	

TOPS: SCOUT	
Anhydrite	1656
Erosion Mississippi	4430
Solid Mississippi	4434

RECEIVED
STATE CORPORATION COMMISSION
OCT 14 1969
CONSERVATION DIVISION
Wichita, Kansas