

7-17

15.159.05447.0001

2-070566

STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - Plugging Section  
130 S. Market, Room 2078  
Wichita, Kansas 67202

API NUMBER: D-00109  
SE, NE, NE, SECTION 15 TOWNSHIP 21 RANGE 7W

OPERATOR LICENSE # 9132 4290 FEET FROM S SECTION LINE  
330 FEET FROM E SECTION LINE

OPERATOR MILTON LACKEY  
NAME & RR #2  
ADDRESS INMAN, KS 67546

LEASE NAME: R. H. HAUSCHIED  
COUNTY: RC Rice  
WELL TOTAL DEPTH: 3969  
PIPE: 7" @ 3373'

128.99

SURFACE CASING: 10 3/4" @ 105'

ABANDONED OIL WELL  GAS WELL  INPUT WELL  SWD  D&A

OTHER WELL AS HEREINAFTER INDICATED: \_\_\_\_\_

PLUGGING CONTRACTOR: MILTON LACKEY  
ADDRESS: SAME AS ABOVE LICENSE: \_\_\_\_\_

COMPANY TO PLUG AT: HOUR: 9:30 DAY: 17 MONTH: 7 YR: 1995

PLUGGING PROPOSAL RECEIVED FROM: MILTON LACKEY

COMPANY NAME: \_\_\_\_\_ PHONE: 316-

WERE: 100 SKS. ON BOTTOM  
50 SKS. 1025'  
250' TO 0'.

PLUGGING PROPOSAL RECEIVED BY: M.L.K.

PLUGGING OPERATIONS ATTENDED BY AGENT? ALL (  ) PART (  ) NONE (  )

COMPLETED: HOUR: 5:00 DAY: 17 MONTH: 7 YEAR: 1995

ACTUAL PLUGGING REPORT:  
RAN TUBING TO BOTTOM PUMPED 100 SKS. PULLED TO 1035'.  
PERFORATED CASING WITH 3 SHOTS PUMPED 50 SKS 2% CALCIUM  
CHLORIDE WAITED 2 HRS. TAGGED CEMENT AT 787'.  
RAN TUBING TO 250' CIRCULATED CMT. TO SURFACE. BACK SIDE  
HAD CEMENT TO SURFACE.

REMARKS: ALLIED 60/40 4%


RECEIVED  
KANSAS CORPORATION COMMISSION

I DID OBSERVE THIS PLUGGING.

INVOICED

JUL 25 1995

DATE 7-28-95

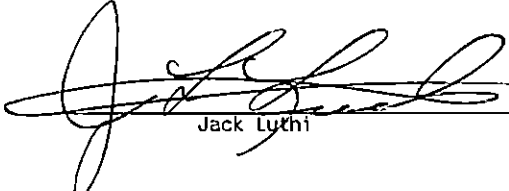

Jack Luthi (AGENT)

CONSERVATION DIVISION  
WICHITA, KS 67203

INV. NO. 43186

7-17

NOV 02 1995

DW