

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-115-00987-00-01
Spot: NESWNWSW Sec/Twnshp/Rge: 21-21S-4E
1678 feet from S Section Line, 4716 feet from E Section Line
Lease Name: WILLIAMS Well #: 1
County: MARION Total Vertical Depth: 2620 feet

Operator License No.: 32361
Op Name: KREHBIEL, HAL GENE AND ALICE DB
Address: 1219 TURKEY CRK DR
MCPHERSON, KS 67460

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2430		60 SX
SURF	8.625	65		50 SX

Well Type: SWD UIC Docket No: D22244.0 Date/Time to Plug: 11/15/2017 8:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2943

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: JEFF KLOCK Witness Type: PARTIAL
Date/Time Plugging Completed: 11/15/2017 6:00 PM KCC Agent: JERRY SPARLING

Actual Plugging Report:

MIRU. COULD ONLY PULL 2" OF STRETCH ON TUBING. BACKSIDE LOADED W/POLYMER. TIED ONTO THE TUBING AND PUMPED 100 SX OF COMMON CEMENT WITH 3% CC AND 150# OF HULLS. RAN DOWN WITH WIRELINE AND ATTEMPTED TO SHOOT OFF TUBING AT 306'. TUBING WOULD NOT COME. TIED ONTO BACKSIDE AND PRESSURED UP TO 1200# THEN TIED ONTO TUBING AND PRESSURED TO 500# AND FINALLY GOT TUBING TO MOVE. TRIPPED OUT 78 JOINTS OF TUBING WITH PACKER. RAN BACK IN TO 305' AND PUMPED 80 SX OF COMMON TO SURFACE. TOPPED OFF WITH 10 SX. TUBING ONLY HAD A SPLIT AT 306'.

Perfs:

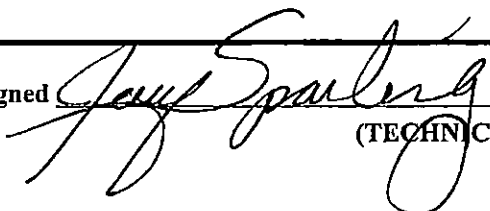
Top	Bot	Thru	Comments
2430	2620		

JAN 03 2018

Remarks: COPELAND TICKET #C45943, FAILED MIT

Plugged through: TBG

District: 02

Signed 
(TECHNICIAN)

JK