

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County. Sec. 36 Twp. 20S Rge. (E) 19 (W)

Location as "NE/CNW%SW%" or footage from lines C SW SE

Lease Owner Mull Drilling Co., Inc.

Lease Name SMITH Well No. 1

Office Address 1625 Wichita Plaza - Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 11-12 1968

Application for plugging filed 11-12 1968

Application for plugging approved 11-12 1968

Plugging commenced 11-12 1968

Plugging completed 5:45 PM 11-12 1968

Reason for abandonment of well or producing formation No oil or gas found in commercial quantities.

If a producing well is abandoned, date of last production -- 19--

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 4370 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	328'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole to 600' with mud. Spotted 100 cubic feet 50-50 pozmix, 6% gel. Mud back to 300' and spotted 20 sacks same. Set solid bridge at 40', capped with 10 sacks.

RECEIVED  
STATE CORPORATION COMMISSION  
NOV 20 1968  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Rains & Williamson Oil Co., Inc.  
Address 1425 Wichita Plaza - Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Wilson Rains (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains  
1425 Wichita Plaza - Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 15 day of November, 19 68

My commission expires June 30, 1971 Sherry Gish Notary Public.

ROTARY DRILLING LOG

Operator: Mull Drilling  
Company, Inc.  
SMITH #1  
C SW SE 36-20S-19W  
Pawnee County, Kansas

Contractor: Rains & Williamson  
Oil Co., Inc.  
Commenced: 11-2-68  
Completed: 11-12-68  
Casing: 8-5/8" @ 328' w/200  
sacks GL-3 cement.

Formations

Clay and Rock	60'
Shale	235'
Sand	280'
Shale	329'
Shale and Sand	560'
Shale	725'
D. Sand	925'
Shale and Red Bed	1325'
Red Bed	1326'
Anhydrite	1351'
Shale	2015'
Shale and Lime	2270'
Lime and Shale	2543'
Lime	2815'
Lime and Shale	2915'
Shale and Lime	3555'
Lime and Shale	3795'
Lime	4370'
Rotary Total Depth (D&A)	4370'

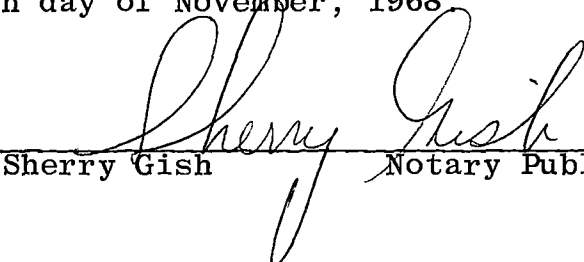
RECEIVED  
STATE CORPORATION COMMISSION  
NOV 20 1968  
CONSERVATION DIVISION  
Wichita, Kansas

We certify the above log is true  
and correct to the best of our  
knowledge and belief.

RAINS & WILLIAMSON OIL CO., INC.

  
Wilson Rains

Subscribed and sworn to before me, a Notary Public within and for the State  
of Kansas, County of Sedgwick, this 19th day of November, 1968

  
Sherry Gish Notary Public

My Commission Expires:  
June 30, 1971