

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

**WELL PLUGGING RECORD**

PAWNEE County, Sec. 34 Twp. 20 Rge. 19W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE SE NW

Lease Owner SANTA FE PIPE & SUPPLY

Lease Name NOLDE Well No. 1

Office Address P. O. BOX 562 - GREAT BEND, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) WASHDOWN

Date well completed 19 63

Application for plugging filed MAY 2 19 63

Application for plugging approved MAY 3 19 63


Plugging commenced MAY 4 19 63

Plugging completed MAY 11 19 63

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

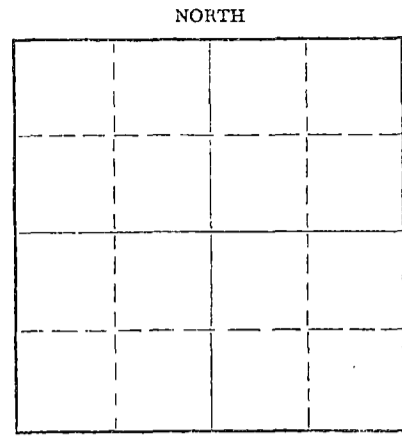

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well MR. ELDON PETTY

Producing formation Depth to top Bottom Total Depth of Well 4450' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	338'	NONE
				4 1/2"	4450'	3245'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- 4380' - 4310' - PLUG BACK WITH SAND
- 4310' - 4262' - 4 SACKS CEMENT
- 4262' - 450' - MUD
- 450' - 220' - CIRCULATED MUD & 20 SACKS CEMENT
- 220' - 40' - 20 SACKS CEMENT
- 40' - 30' - 10' ROCK BRIDGE
- 30' - BASE - 10 SACKS CEMENT

RECEIVED  
STATE CORPORATION COMMISSION

JUN 6 1963

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor ACE PIPE PULLING COMPANY

Address P. O. BOX 304 - GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.

T. L. NUTT (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. L. Nutt

P. O. BOX 562 - GREAT BEND, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of JUNE, 19 63

Mary M. Guesnier  
Mary M. Guesnier Notary Public.

My commission expires JULY 31, 1966

