


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ness County. Sec. 10 Twp. 20 Rge. 21 (X) (W)
 Location as "NE/CNWSW¼" or footage from lines 660' FSL, 660' FWL
 Lease Owner Cities Service Oil Company
 Lease Name McJunkin "A" Well No. 2 SWD
 Office Address 209 E. William, 700 Sutton Place Bldg. Wichita, Ks
 Character of Well (completed as Oil, Gas or Dry Hole) SWD
 Date well completed 10-8-68
 Application for plugging filed 8-10-1976
 Application for plugging approved 8-11-1976
 Plugging commenced 8-11-1976
 Plugging completed 8-11-1976
 Reason for abandonment of well or producing formation Uneconomical

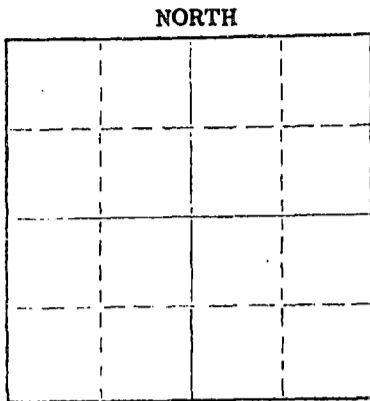

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production --- 19 --
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
 Producing formation Topeka Depth to top _____ Bottom _____ Total Depth of Well 4447 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	504'	None
		9-24-76		4-1/2"	4446'	None
	SEP 24 1976					
	CONSERVATION DIVISION Wichita, Kansas					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Ran 54 joints 2" tubing open end to 1686'. Pumped 20 sacks get 3 sacks hulls.
 70 sacks Halco Lite. Cement pulled 34 joints tubing at 615' 2 sacks gel.
 2 sacks hulls 130 sacks Halco Lite cement. Cement did not circulate.
 Ran SLM - 285'. Dumped 4-1/2" yards redmix cement filled to base of cellar.

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Cities Service Oil Company
 Address 209 E. William, 700 Sutton Place Bldg., Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick
W. J. Devaney (employee of ~~XXXXX~~ or ~~XXXXX~~ or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. J. Devaney
700 Sutton Place Bldg., Wichita, Kansas 67202
 (Address)

SUBSCRIBED AND SWORN TO before me this 21 day of Sept., 19 76

My commission expires 6/3/77

Glenn E. Meier
 Glenn E. Meier Notary Public.

15.135.30043.0000

Casing Record:

8 5/8" @ 504' w/275 sacks.
4 1/2" @ 4446' w/100 sacks.

Formation Record:

Depth:

clay & lime	0- 50
clay, lime & shale	100
shale	300
sand	330
shale	905
sand	1105
shale & red bed	1463
anhydrite	1497
shale & shells	2200
lime & shale	2570
lime	2790
lime & shale	3075
lime & chalky shale	3315
lime & shale	3820
lime	4398
shale & sand	4402
lime & chert	4427
cherty lime	4433
chert	4447 R.T.D.

RECEIVED
STATE CORPORATION COMMISSION

AUG 11 1976

CONSERVATION DIVISION
Wichita, Kansas