


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Ness County, Sec. 19 Twp. 20 Rge. 21 (E) (W)

Location as "NE/CNW*SW¼" or footage from lines NW SE
Lease Owner Mobil Oil Corporation
Lease Name Whipple Cole Well No. 1
Office Address P. O. Box 1070 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 9-17-69 19
Application for plugging approved 9-18-69 19
Plugging commenced 10-8-69 19
Plugging completed 11-20-69 19
Reason for abandonment of well or producing formation

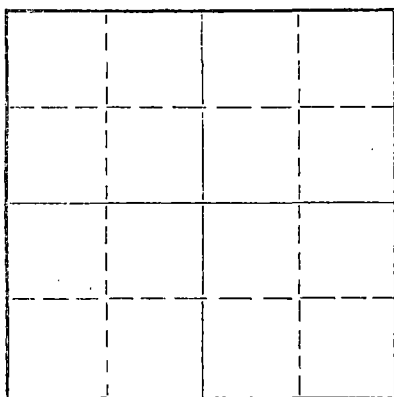

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation Depth to top Bottom Total Depth of Well 4370 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	516	None
				5 1/2	None	2496
RECEIVED STATE CORPORATION COMMISSION DEC 2 1969 CONSERVATION DIVISION Wichita, Kansas						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dug cellar. Rigging up unit. Sanded bottom back to 4300'. Had collar on 5 1/2" strapped on pipe. Hembree Tank welded collar. Working pipe - 22" stretch at 3500 psi.

Dumped 5 sacks of cement on bottom with dump bailer. Central Transport loaded hole. Shot pipe at 3000' - 2800' - 2600' and 2520'. Working pipe.

Pulled 35 joints of pipe. Oil and saltwater flowed out of casing. Hembree Tank pumped out cellar and oil and water from around location. Repacked braden head and closed in sacing.

Hembree Tank Service pumped mud plug out of pipe. Finished pulling pipe. Tallied pipe.

Allied Cementing Company, Inc. squeezed well with 2 sacks of hulls, 15 sacks of mud and 120 sacks of 50/50 pozmix with 6% gel. Finished with 750 psi.

Tore down rig, loaded and tried to move out of muddy location.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.


James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 24 day of November, 1969

My commission expires May 27, 1973

Notary Public.



DRILLER'S LOG

COMPANY: Mobil Oil Corporation
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: D. WHIPPLE #1
 LOCATION: C NW SE SEC. 19-20S-21W
 NESS COUNTY, KANSAS
 COMMENCED: 1-20-67
 COMPLETED: 1-29-67

0	165	Surface Soil, Post Rock, Shale
165	200	Sand
200	600	Shale
600	774	Redbed
774	784	Blaine
784	842	Shale
842	1030	Sand
1030	1421	Shale
1421	1463	Anhydrite
1463	2309	Shale, Shells
2309	2830	Lime
2830	3805	Lime, Shale
3805	4370	Lime
	<u>4370</u>	<u>RTD - Set 5 1/2" Casing</u>

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 19 1969
 CONSERVATION DIVISION
 Wichita, Kansas

8 5/8" new 24# surface casing set @ 516' cemented with 300 sacks of Common cement, 3% cc


I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the D. Whipple #1 Well, located C NW SE of Section 19, Township 20 South, Range 21 West, Ness County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite

Leslie Kite

STATE OF KANSAS)
)
 COUNTY OF BARTON) SS

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 1st day of February, 1967.



Ulanda Nichols

Ulanda Nichols

My Commission Expires:
 April 1, 1967