


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

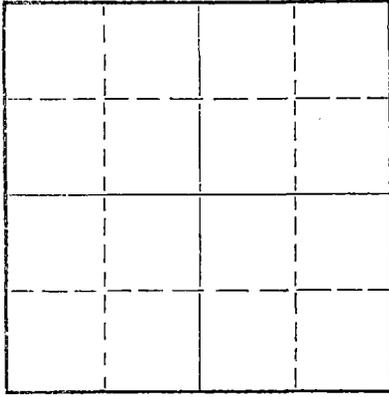

Locate well correctly on above
Section Plat

Ness County, Sec. 20 Twp. 20S Rge. (E) 21 (W)
Location as "NE/CNW/SW" or footage from lines 150' E C/NW SW
Lease Owner R. V. Lehner
Lease Name Dienes Well No. 1
Office Address P. O. Box 398, Ness City, Kansas 67560
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 12 19 70
Application for plugging filed June 12 19 70
Application for plugging approved June 12 19 70
Plugging commenced June 12 19 70
Plugging completed June 12 19 70
Reason for abandonment of well or producing formation Dry Hole


If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4415 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	288'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Plugged hole as follows: Plugged at 600' with 70 sacks of pozmix; plugged at 270' with 20 sacks of pozmix; plugged at 40' with 10 sacks of pozmix. Plug down at 9:10 A. M. June 12, 1970.

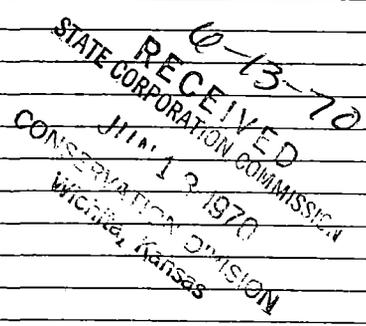


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Strata Drilling, Inc.
Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Charles W. Steincamp (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles W. Steincamp
Charles W. Steincamp, President
Box 355, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of June, 19 70
My commission expires December 14, 1973



Elaine H. Taylor
Elaine H. Taylor Notary Public.

DRILLERS LOG

#1 Dienes

CASING RECORD:
288' of new 8-5/8"
surface casing.

COMPANY: R. V. Lehner
CONTRACTOR: Strata Drilling, Inc.

DESCRIPTION: 150' E C/NW SW
Section 20-20S-21W
Ness County, Kansas

TOTAL DEPTH:
4415'

COMMENCED: June 5, 1970
COMPLETED: June 12, 1970

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay, Rock & Shale	0	95	Ran 288' of new 8-5/8" surface casing; set and cemented at 288' with 160 sacks of regular cement, 2% gel and 3% C. C. Plug down at 7:20 P. M. June 5, 1970.
Rock, Shale & Sand	95	309	
Clay & Red Bed	309	783	
Red Bed	783	805	
#1 Anhydrite	805	813	
Red Bed	813	894	
Sand	894	1095	
Red Bed & Shells	1095	1452	
#2 Anhydrite	1452	1489	
Red Bed, Shale & Shells	1489	1534	
Red Bed, Shale & Shells	1534	2041	
Shale & Lime	2041	4241	
Lime	4241	4410	
Lime & Chert	4410	4415	

ROTARY TOTAL DEPTH: 4415'

RECEIVED
STATE CORPORATION COMMISSION
JUN 18 1970
CONSERVATION DIVISION
Wichita, Kansas

D. & A.

Plugged hole as follows: Plugged at 600' with 70 sacks of pozmix; plugged at 270' with 20 sacks of pozmix; plugged at 40' with 10 sacks of pozmix. Plug down at 9:10 A. M. June 12, 1970.

STATE OF KANSAS)
) ss.
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.

Charles W. Steincamp
Charles W. Steincamp, President

Subscribed and sworn to before me this 16th day of June, 1970.



Elaine H. Taylor
Elaine H. Taylor, Notary Public