

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas, 67217  
NORTH

WELL PLUGGING RECORD

Ness County, Sec. 17 Twp. 20 Rge. 23 (E) (W) X

Location as "NE/CNW/SW" or footage from lines SW NE SW

Lease Owner Okmar Oil Co.

Lease Name Lehner Well No. #1

Office Address 1130 Vickers KSB&T Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 2-17-72 19

Application for plugging approved 19


Plugging commenced 3-17-72 19

Plugging completed 3-19-72 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

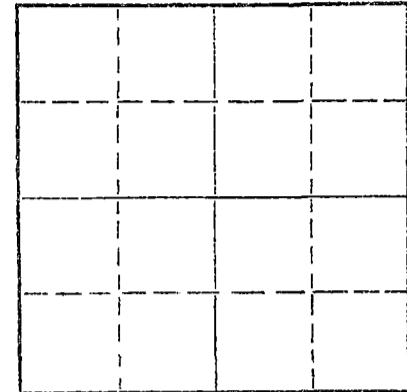

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 4375' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	4365'	921.77'
				8 5/8"	287.07'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made botom hole plug back with sand to 4350'. Mixed and ran 5 sacks cement thru dump bailer.

Squeezed with 3 sacks hulls - 20 sacks gel and 130 sacks pozmix.

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 22 1972  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.

Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.

Box 364 Great Bend, Kansas


(Address)

SUBSCRIBED AND SWORN to before me this 21 day of March, 19 72

Sidney D. Miller

Notary Public.

My commission expires



D R I L L E R S    L O G

#1 LEHNER

CASING RECORD: 287.07' of new 8-5/8" surface casing.	COMPANY: Okmar Oil Company	DESCRIPTION: SW NE SW Section 17-20S-23W Ness County, Kansas
TOTAL DEPTH: 4375'	CONTRACTOR: Strata Drilling, Inc.	ELEVATION: 2269' KB
	COMMENCED: July 24, 1970	
	COMPLETED: August 2, 1970	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay, Post Rock, Shale & Sand	0	307	Ran 287.07' of new 8-5/8" surface casing; set and cemented at 287.07' with 160 sacks of regular cement, 2% gel and 3% C. C. Plug down at 11:00 P. M. July 25, 1970.
Shale & Sand	307	635	
Red Bed, Shale & Sand Streaks	635	882	
#1 Anhydrite	882	895	
Red Bed, Shale & Shells Sand	895	972	
Sand	972	1182	
Red Bed & Shale	1182	1499	
Anhydrite #2	1499	1523	
Red Bed, Shells & Shale	1523	1747	
Shale	1747	2032	
Shale & Shells	2032	2462	
Shale & Lime	2462	3534	
Lime, Shale & Sand	3534	3652	
Shale & Lime	3652	4247	
Lime & Chert	4247	4325	
Lime	4325	4365	
Chert & Lime	4365	4375	

Total Depth 4375'

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 18 1972  
CONSERVATION DIVISION  
Wichita, Kansas

5 1/2" casing set and cemented at 4365' with 75 sacks of cement, salt saturated.

STATE OF KANSAS )  
                          ) ss.  
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.

*Charles W. Steincamp*  
Charles W. Steincamp, President

Subscribed and sworn to before me this 3rd day of August, 1970.

*Elaine H. Taylor*  
Elaine H. Taylor, Notary Public

