

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Pawnee

County. Sec. 33 Twp. 21S Rge. (E) 16 (W)

Location as "NE/CNW/SW" or footage from lines CW/2 NW/4 SE/4

Lease Owner Rocket Drilling Co.

Lease Name Palmer Well No. 1

Office Address 1019 Central Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed April 18 19 56

Application for plugging filed May 19 19 59

Application for plugging approved May 20 19 59


Plugging commenced June 15 19 59

Plugging completed June 17 19 59

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production Feb. 28 19 59

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well

Producing formation Arbuckle Depth to top 3832 Bottom 3839 Total Depth of Well 3850 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Oil	3832	3839	8-5/8"	985	none
				5-1/2"	3838	3046'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to T.D. of 3850' ran 50 gallons sand. Checked sand to 3830' dumped 5 sacks cement. Shot pipe at 3030', mixed 8 sacks mud and four sacks hulls and pumped into casing. Pulled 93 joints, cleared hole and cleaned cellar for welder. Pumped 30 sacks mud and 100 sacks cement to surface pipe.

Surface pipe was left intact for water well conversion.

Reported by Petroleum Management, Inc. as operator.

RECEIVED
STATE CL
MISSION

JUN 30 1959

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Knight Casing Pulling Co.
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
John W. Ritchey (employee of _____ or _____ or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) *John W. Ritchey*
1019 Central Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of June, 19 59

Mace C. Murphy
Notary Public.

My commission expires April 23, 1962

PLUGGING
FILE SEC. 33 T. 21 R. 16 W
BOOK PAGE 37 LINE 29

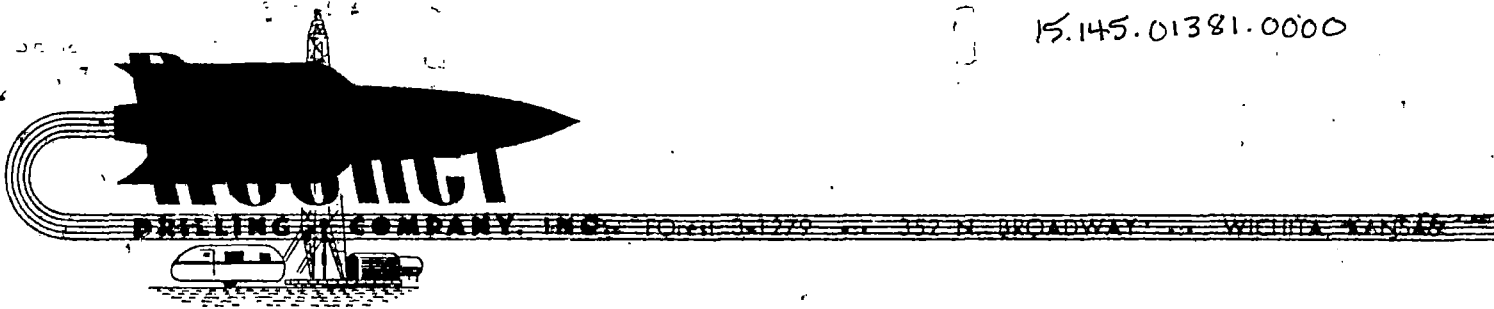

Rocket Drilling Company, Inc.
 #1 Palmer Unit
 Approx. C W/2 NW/4 SE/4 Sec. 33-215-16W
 Pawnee County, Kansas

Elevation: 1991 Gr.; 1993 D.F.; 1995 R. B.
 Spudded: March 28, 1956
 Rotary Completed: April 8, 1956
 Contractor: Rocket Drilling Company, Inc.

CASING RECORD

985' of 8-5/8" O.D. 24# seamless casing cemented with 435 sacks cement.
 3838' of 5-1/2" O. D. 11# seamless casing cemented with 120 sacks cement.

DRILLERS LOG

Clay & Sand	0 to 155	Sand	2030
Shale & Clay	320	Lime	2080
Sand	345	Sand	2090
Shale Blue	415	Lime	2180
Sand	550	Sand	2190
Shale Red	575	Lime	2420
Sand	590	Sand	2435
Shale Red	979	Shale & Lime	3195
Anhydrite	995	Lime	3282
Shale & Shells	1150	Shale & Lime	3518
Shale & Salt	1755	Kansas City	3621
Shale	1800	Lime	3798
Lime & Shale	1925	Lime & Shale	3831
Salt & Lime	2020	Simpson & Anhydrite	3839

STATE OF KANSAS
 COUNTY OF SEDGWICK

SS:

RECEIVED
 COMMISSION

JUN 30 1959

CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify that to the best of my knowledge and belief, the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.

L. H. Myrick
 L. H. Myrick

Subscribed and sworn to before me, a Notary Public, on and for the County and State aforesaid, this 10th day of April, 1959.

My commission expires:

10/20/1959

PLUGGING
 FILE SEC. 33 T. 21 R. 16 W
 BOOK PAGE 39 LINE 39

Jeannette Selmer Spence
 Notary Public