


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County. Sec. 33 Twp. 21S Rge. 16W (E) (W)  
Location as "NE/CNW/SW" or footage from lines C N/2 SW/4  
Lease Owner Rocket Drilling Company, Inc.  
Lease Name Larned Townsite Unit 9 Well No. 1  
Office Address 352 North Broadway, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed August 3 19 56  
Application for plugging filed August 3 19 56  
Application for plugging approved August 6 19 56  
Plugging commenced August 3 19 56  
Plugging completed " 19 56  
Reason for abandonment of well or producing formation Non-Productive

NORTH



Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. R. M. Brundage, Hoisington, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3593 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	991	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set Bottom Plug @ 1000' with hulls and 30 sacks cement;  
Set Middle Plug @ 330' with hulls and 20 sacks cement;  
Set Top Plug @ 30' with hulls and 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rocket Drilling Company, Inc.  
Address 352 North Broadway, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
L. H. Myrick (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. H. Myrick  
L. H. Myrick  
352 North Broadway, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 7 day of August, 19 56


My commission expires 10/28/1959

Notary Public.  
STATE CORPORATION COMMISSION

ADG 81236 8-8-56

CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
FILE SEC. 33 T. 21 R. 16W  
BOOK PAGE 87 LINE 11

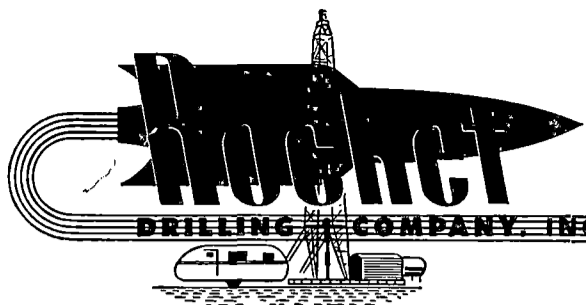

Forest 3-1279 352 N. BROADWAY WICHITA, KANSAS

Rocket Drilling Company, Inc.  
#1 Larned Townsite Unit #9  
C N/2 SW/4 Section 33-21S-16W  
Pawnee County, Kansas

Elevation: 2001 Gr.; 2004 D.F.; 2006 R.B.  
Spudded: July 20, 1956  
Rotary Completed: August 3, 1956  
Contractor: Rocket Drilling Company, Inc.

CASING RECORD

991' 8-5/8" O.D. 24# seamless casing cemented with 380 sacks cement.

DRILLERS LOG

Cellar Dirt	0 to 5	Shale & Lime	2000
Clay	15	Lime	2240
Sand	105	Lime & Shale	2675
Shale	180	Shale & Lime	2983
Sand & Shale	680	Lime & Shale	3152
Red Bed & Shale	982	Shale & Lime	3284
Anhydrite	1010	Lime	3593 T.D.
Shale & Shells	1845		

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK)

I hereby certify that to the best of my knowledge and belief the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.

*L. H. Myrick*  
L. H. Myrick

Subscribed and sworn to before me, a Notary Public, in and for the County and State aforesaid, this 7 day of August, 1956

My commission expires:

10/28/1959

*Jeannette Helms*  
Notary Public  
STATE OF KANSAS  
COMMISSION EXPIRES 10/28/1959

PLUGGING  
FILE SEC. 33 T. 21 R. 16W  
BOOK PAGE 87 LINE 11

CONSERVATION DIVISION  
Wichita, Kansas