


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

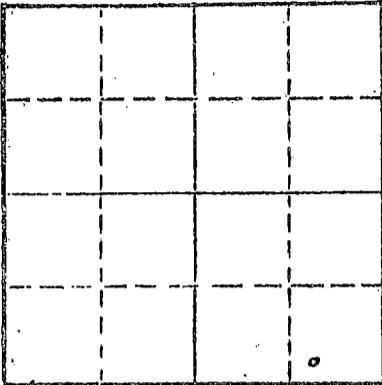

Locate well correctly on above
Section Plot

Stafford County, Sec. 27 Twp. 21 Rge. (E) 13 (W)
Location as "NE/CNW/KSW" or footage from lines SW SE SE
Lease Owner Atlantic Richfield Company
Lease Name Gates Well No. 8
Office Address Box 521, Tulsa, Oklahoma 74102
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 1974
Application for plugging filed January 4 1974
Application for plugging approved 1974
Plugging commenced April 16 1974
Plugging completed April 23 1974
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 1974
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3659 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	260'	10 3/4"	260'	none
			3652'	7"	3652'	1606.70

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 2000' and dumped 7 sacks of cement.

Halliburton plugged well with 3 sacks of hulls, 15 sacks of gel and 125 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
APR 26 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas 67526

STATE OF KANSAS COUNTY OF BARTON
Evelyn Roth (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



I. J. RADER
STATE NOTARY PUBLIC
Barton County, Kansas
My Comm. Expires July 7, 1976

(Signature) Evelyn Roth
Ellinwood, Kansas

SUBSCRIBED AND SWORN TO before me this 25th day of April, 1974

My commission expires July 7, 1976


Notary Public

ATLANTIC REFG. CO.
Gates No. 8.

SEC. 27 T. 21 R. 13W
SW SE SE

Total Depth. 3659'
Comm. 10-18-38 Comp. 11-16-38
Shot or Treated. 2000 Gals 11-15-38
Contractor. Reading & Bates, Inc.
Issued. 12-10-38 Rotary w/cable
tool completion.

County. Stafford



CASING:
10 3/4" 260' 235 24
7 " 3652' 150 24

Elevation. 1877

Production. Pot. 1424 B.

Figures Indicate Bottom of Formations.

surface	269
red bed & shale	695
anhydrite lime	735
shale & lime shells	775
shale	905
red bed	940
shale & shells	1090
shale	1250
salt	1285
salt & shale	1530
lime & shale	1550
lime	1590
lime & shale	1630
lime	1710
shale & lime shells	1745
shale & shells	1765
lime sdy	1780
lime & shale	1795
lime	1910
shale & limo shells	1940
lime	1970
shale	1990
shale & lime	2060
lime	2100
shale & limo	2915
lime	3010
shale & limo	3040
lime hrd	3070
lime brkn	3085
lime	3210
lime & shale	3316
limo	3480
Core #1 5' rec 3480-3486	
limo	3560
lime & chert	3590
chert	3600
shale	3620
lime	3655
shale green sh oil	3656
oolitic chert	3658
lime	3659
Total Depth.	

RECEIVED
STATE CORPORATION COMMISSION
JAN 7 1974
CONSERVATION DIVISION
Wichita, Kansas