

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

Stafford County, Sec. 27 Twp. 21 Rge. 13W (E) (W)

Location as "NE/CNW/SE/SW" or footage from lines. NE SE SE

Lease Owner ~~XXXXXXXXXXXX~~ Atlantic Richfield Company

Lease Name Gates #7 Well No. \_\_\_\_\_

Office Address Dallas, Texas 75221

Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_

Date well completed \_\_\_\_\_ 19\_\_

Application for plugging filed \_\_\_\_\_ 19\_\_

Application for plugging approved \_\_\_\_\_ 19\_\_


Plugging commenced 2/1/72 \_\_\_\_\_ 19\_\_

Plugging completed 2/4/72 \_\_\_\_\_ 19\_\_

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

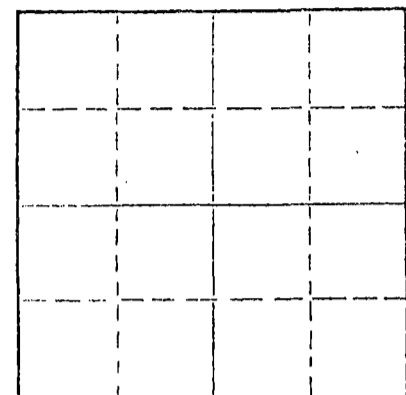

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Biberstein

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3644 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	258'	none
				7"	3536'	1600'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Raised mast, checked hole, pushed plug to top of 4" liner at 3261', set 6 sacks of cement. Shot pipe at 2290', 2075', 1800', 1708', 1607', pulled 7" casing. Bailed hole to ~~180'~~ 180', set 20' rock bridge and ran 4 yards of ready mix.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 8 1972  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.

Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS  
(Address)

7th day of February, 1972

SUBSCRIBED AND SWORN to before me this  
MARGARET MELCHER  
NOTARY PUBLIC  
Rice County, Kansas  
My Commission Expires  
Feb. 15, 1975


Margaret Melcher  
Notary Public.

ATLANTIC REFINING CO.  
 Gatos No. 7.

SEC. 27 T. 21 R. 13W.  
 NE SE SE

Total Depth. 3644.  
 Comm. 8-2-38 Comp. 8-27-38  
 Shot or Treated. 2000 gal.  
 Contractor, Reading and Bates, Inc.  
 Issued, 9-17-38.

County Stafford.



Rotary and Cable.  
 CASING.

103/4" 258' 7" 3535' 150 2/4

Elevation. 1876'

Production. Pot. 1949 B.  
 Pumping.

Figures Indicate Bottom of Formations.

surface	70
sand and gravel	150
shale	258
red bed	695
anhydrite	737
Top of Anhydrite	695
sand and shale	765
sdv shale	795
shale and sholls	1485
lime hard	1495
lime and shale	1555
broken lime	1650
broken lime and shale	1855
lime	1875
shale	1900
lime	1915
sdv lime	1945
lime	1960
lime and shale	2900
shale and sholls	2920
lime and shale	3190
lime	3251
lime and shale	3320
lime	3435
shale	3445
lime white	3549
lime and shale hard sholls	3559
chort and shale	3577
chort and lime	3592
shale	3637
chort and lime	3639
correction to floor Level	3639 equals 3637
lime sat.	3639
300' fill up. oil in one hour.	
Colitic sat. lime 800' oil	
in one hour	3641
lime	3644

Total Depth.

RECEIVED  
 STATE CORPORATION COMMISSION  
 NOV 22 1971  
 CONSERVATION DIVISION  
 Wichita, Kansas