

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

PAWNEE

County. Sec. 33 Twp. 21S Rge. (E) 16(W)

Location as "NE/CNW&SW" or footage from lines C S/2 S/2 SW/4

Lease Owner PETROLEUM MANAGEMENT, INC, for ROCKET DRG. CO.

Lease Name LARNED TOWNSITE UNIT #11 Well No. 1

Office Address 1019 Central Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed June 25 19 56

Application for plugging filed February 13, 19 59

Application for plugging approved February 18, 19 59

Plugging commenced JANUARY 1, 19 59


Plugging completed JANUARY 18, 19 59

Reason for abandonment of well or producing formation

Depleted

If a producing well is abandoned, date of last production January 15 19 59

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well H. Lewis Brock Frank Broadfoot

Producing formation Arbuckle Depth to top 3837 Bottom 3888 Total Depth of Well 3888 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Oil	3838	3846	8-5/8" OD	986	none
				5 1/2" OD	3888	2900

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged bottom of hole with 5 sacks cement, shot pipe at 3085', 2987'. Spotted 70 barrels oil at 2889'. Pulled 2900' pipe. Pumped 20 sacks mud and 50 sacks cement. Finished plugging hole with 20 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E & L Casing Pulling Co.

Address Great Bend, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

John W. Ritchey (employee of owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

John W. Ritchey
1019 Central Bldg. Wichita 2, Kans.

SUBSCRIBED AND SWORN TO before me this 13th day of March, 19 59

Notary Public


My commission expires April 23, 1962

RECEIVED STATE CORPORATION COMMISSION

PLUGGING
FILE SEC 33 T 21 R 16 W
BOOK PAGE 15 LINE 13

MAR 14 1959

CONSERVATION DIVISION
Wichita, Kansas

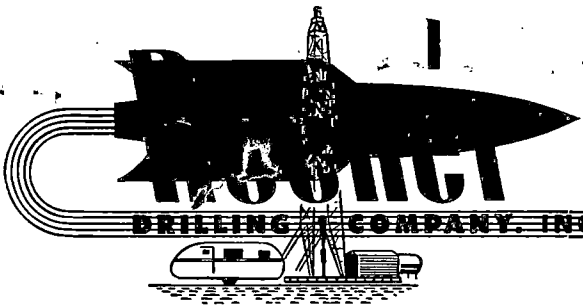

352 N. BROADWAY WICHITA, KANSAS

Rocket Drilling Company, Inc.
 #1 Larned Townsite Unit 11
 C S/2 S/2 SW/4 Section 33-21S-16W
 Pawnee County, Kansas

Elevation: R.B.
 Spudded: June 14, 1956
 Rotary Completed: June 22, 1956
 Contractor: Rocket Drilling Company, Inc.

CASING RECORD

986' 8-5/8" O.D. 2 1/4# seamless casing cemented with 410 sacks cement.
 3888' 5-1/2" O.D. 1 1/4# seamless casing cemented with 125 sacks cement.

DRILLERS LOG

Clay & Sand	0 to 180	Lime	2190
Clay & Shale	325	Sand	2195
Sand	340	Lime	2445
Shale	410	Lime & Shale	2650
Sand	525	Shale	2895
Shale	570	Shale & Lime	3160
Sand & Shale	625	Lime & Shale	3281
Shale	980	Lime	3341
Anhydrite	986	Shale	3397
Shale & Shells & Salt	1570	Shale & Lime	3537
Shale & Lime	1955	Lime	3750
Lime	2070	Shale	3838
Sand	2090	Arbuckle	3888 T.D.

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I hereby certify that to the best of my knowledge and belief the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.

L. R. Myrick

Subscribed and sworn to before me, a Notary Public, in and for the County and State aforesaid, this 25th day of June, 1956.

My commission expires: 8-7-1961

Zella Ford
 Notary Public

~~10/28/1959~~

RECEIVED
 STATE CORPORATION COMMISSION

PLUGGING
 FILE SEC 33 T 21 R 16W
 BOOK PAGE 15 LINE 13

MAR 14 1959
 CONSERVATION DIVISION
 Wichita, Kansas