

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Pawnee County. Sec. 8 Twp. 20S Rge. 19W (E) (W)

Location as "NE/CNW/SW" or footage from lines C of NE/4 SW/4

Lease Owner Carl Todd Drilling Company

Lease Name Pfenninger Well No. 1

Office Address 404 KFH Bldg. - Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed April 4 1955

Application for plugging approved April 4 1955

Plugging commenced April 5 1955


Plugging completed April 11 1955

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH

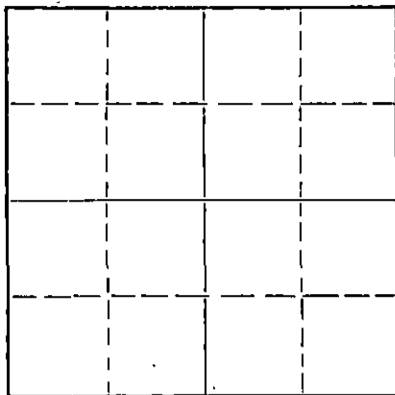

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Merle Rives

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4271 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
(No log is available, as of an old dry hole)	this was a wash-down			16" OD	202'	None
				5-1/2"	4271'	2836'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Cement shoe was not drilled out and top of cement inside pipe was 4236'. Casing was perforated from 4124' to 4136'. Filled hole with sand from 4236' to 4110' and ran 5 sacks of cement. Mudded the hole to 250', set a 10' rock bridge and ran 30 sacks of cement. Mudded the hole to 20', set a rock bridge and ran 20 sacks of cement on top. Plugging completed.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor West Supply Co., Inc.

Address Chase, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Carl Todd (employee or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Carl Todd

404 KFH Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 18th day of April, 1955

My commission expires December 14, 1957

Martha Boyer
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
APR 19 1955
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 8 T 20 R 19W
BOOK PAGE 108 LINE 38