

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Pawnee County, Sec. 1 Twp. 20S Rge. 20 (E) W (W)

Location as "NE/CNW/SW" or footage from lines C/SW NW
Lease Owner Aylward Drilling Company
Lease Name Russell Well No. 1
Office Address 909 First National Bank Building, Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) D&A
Date well completed July 15, 1969
Application for plugging filed July 15, 1969
Application for plugging approved July 15, 1969
Plugging commenced July 15, 1969
Plugging completed July 15, 1969
Reason for abandonment of well or producing formation D&A

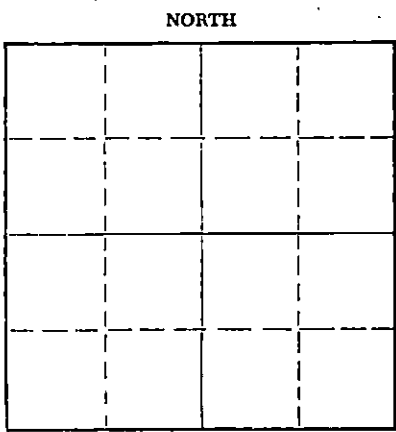

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4345 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	523.22'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug @ 500' w/25 sx.
Plug @ 40' w/10 sx
5 sx in rathole


RECEIVED
STATE CORPORATION COMMISSION
JUL 31 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Norman E. Klein (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Norman E. Klein
1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 29th day of July, 19 69



My commission expires 10-25-72
Gloria Fawcett
Notary Public.

DRILLERS LOG

No. 1 Russell

CASING RECORD:	COMPANY:	Aylward Drilling Company	DESCRIPTION:
8 5/8" @ 530'	CONTRACTOR:	Red Tiger Drilling Co.	C/SW NW
w/350 sx cement	COMMENCED:	July 15, 1969	1-20S-20W
	COMPLETED:	July 24, 1969	Pawnee County, Kansas
TOTAL DEPTH: 4345'			ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sod, Shale, Sand	0	370	
Shale	370	530	
Shale & Red Bed	530	726	
Blaine	726	733	
Shale	733	820	
Sand	820	1030	
Red Bed, Shale	1030	1408	
Anhydrite	1408	1438	
Shale	1438	1825	
Shale & Lime	1825	2482	
Lime	2482	2699	
Shale & Lime	2699	3800	
Lime	3800	4345	


RECEIVED
STATE CORPORATION COMMISSION
JUL 31 1969
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Norman E. Klein
Norman E. Klein

Subscribed and sworn to before me this 29th day of July, 1969.



Gloria Fawcett
Notary Public

Commission Expires:

10-25-72