

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Pawnee County, Sec. 8 Twp. 20S Rge. 20 (W)

Location as "NE/CNW/SW" or footage from lines SE NE
Lease Owner Pickrell Drilling Company
Lease Name Fox "A" Well No. 2
Office Address 705 Fourth National Bank Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 8 1972
Application for plugging filed June 8 1972
Application for plugging approved June 8 1972
Plugging commenced June 8 1972
Plugging completed June 8 1972
Reason for abandonment of well or producing formation Dry Hole

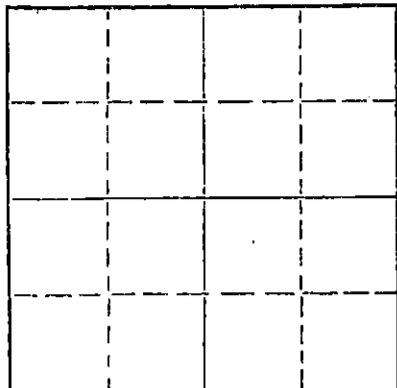

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation Depth to top Bottom Total Depth of Well 4359 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	265	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom Plug @ 500' w/50 sacks, Middle Plug @ 240' w/25 sacks,
Top Plug @ 40' w/10 sacks.

RECEIVED
STATE CORPORATION COMMISSION
JUN 20 1972
CONSERVATION DIVISION
Wichita, Kansas
15-20-1972

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Building, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
C. W. Sebitts (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
705 Fourth National Bank Bldg., Wichita, Kansas
(Address)

Subscribed and sworn to before me this 13th day of June, 1972



Esther Lamone
Notary Public.

My commission expires January 19, 1973

ROTARY DRILLING LOG

15.145.20259.0000

COMPANY: Pickrell Drilling Company
705 Fourth National Bank Building
Wichita, Kansas 67202

Rotary Drilling Commenced 5/30/72

Rotary Drilling Completed 6/8/72

LOCATION: Fox "A" No. 2, SE NE Section 8-20S-20W,
Pawnee County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: Run 7 Jts. 8-5/8" surface casing set @ 265' KB. Cemented with
150 sacks. Completed 6:30 P.M. Circulated.

D & A, No oil string run. Plugged down 11:45 A.M. June 9, 1972.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

50	Post Rock	C.F.S.
65	Post Rock	4335
267	Shale & Shells	4345
300	Sand	4350
700	Shale & Red Bed	4359
715	Blain	
805	Red Beds	
1040	Sand	
1375	Shale, Red Beds	
1387	Shale	
1415	Anhydrite	
1760	Shale	
2090	Shale & Lime	
2210	Lime - Shale	
3405	Lime	Slope Tests
3715	Lime - Shale	2000
4335	Lime	2500
4359	Mississippi, RTD	3000
		3500
		4000

RECEIVED
STATE CORPORATION COMMISSION
JUN 20 1972
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.


PICKRELL DRILLING COMPANY

By C. W. Sebitts Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

On this 13th day of June, 1972, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.



My commission expires: January 19, 1973

Esther Lamone
Notary Public