


STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Pawnee SEC. 4 TWP. 20S RGE. 18 XE/W
Location as in quarters or footage from lines:
1490' FNL x 1320' FEL of Seciton

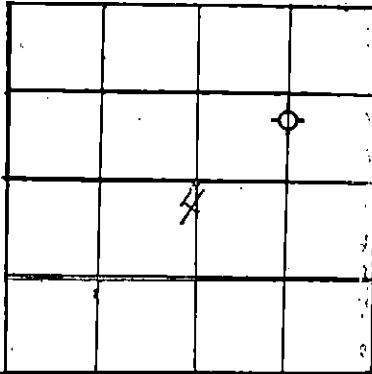

Locate Well
correctly on above
Section Platt.

Lease Owner Anador Resources, Inc.
Lease Name Schope Well No. 1-4
Office Address 5700 So. Quebec, #320, Englewood, CO 80111
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
Date Well Completed 10/4/83
Application for plugging filed No
Plugging commenced 10/4/83
Plugging completed 10/4/83 10:30 a.m.
Reason for abandonment of well or producing formation Non-commercial

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Richard Lacy
Producing formation None Depth to top -- bottom -- T.D. 2411'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Krider	salt water	2161	2171	7"-17#	1009'	-0-
Winfield	salt water	2214	2226	4 1/2" -10 1/2#	2411'	-0-
Towanda	salt water	2283	2297			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pump 3 BW in 4 1/2" csg. followed by 1 sx cottonseed hulls and 150 sx 50-50 POZMIX x 2% gel x 3% CaCl. Entire casing full of cement.
Cut off casing 5' below ground level and backfill.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sun Cementing

STATE OF Colorado COUNTY OF Arapahoe, ss.
Jerry A. Pope (employee of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Pope
5700 So. Quebec, Suite 320
(Address) Englewood, Colorado 80111

SUBSCRIBED AND SWORN TO before me this 18th day of November, 19 83

Kris Ann Rosengren
Notary Public.

My Commission expires: 9/15/84

RECEIVED
STATE CORPORATION COMMISSION

NOV 21 1983

Wichita, Kansas

11-21-1983