

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Pawnee County. Sec. 17 Twp. 20 Rge. 18 (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE NE

Lease Owner Isern Drilling Company

Lease Name Bailey Well No. 1

Office Address Box 45, Ellinwood, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed August 22, 1953 19

Application for plugging filed August 22, 1953 19

Application for plugging approved August 22, 1953 19


Plugging commenced August 22, 1953 19

Plugging completed August 22, 1953 19

Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

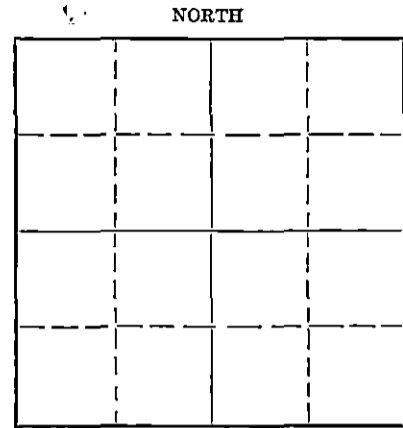

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 4123 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
	Surface Pipe			8-5/8"	332'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from 4123 to 300'; set plug at 300', dumped 1/2 sack hulls and 15 sacks cement on plug. Filled hole with mud to 40'; set another plug at 40' and dumped 1/2 sack hulls and 10 sacks cement on bridge, cement returning to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Isern Drilling Company

Address Box 45, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.

I, M. M. Shropshire (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) M.M. Shropshire

Lyons, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 24th day of August, 1953.

George A. Meyer
Notary Public.

My commission expires Feb. 10, 1955.



WELL LOG

ISERN DRILLING COMPANY ETAL, Owner - Bailey #1
NE/4 NE/4 NE/4 Section 17, Township 20, Range 18W,
Pawnee County, Kansas

Elevation: 2204 DF

Figures indicate bottom of formation

0	to	40	shale & post rock
		275	shale & shells
		328	lime stone & shale
		335	shale
		390	sand
		690	shale & shells
		850	sand
		1130	red bed
		1288	shale
		1323	anhydrite
		1770	shale & shells
		1940	salt
		2180	shale & shells
		2770	lime & shale
		3110	shale & shells
		3680	lime & shale
		4010	lime
		4101	lime & shale
		4123	Arbuckle
		4123	Total Depth D&A

Pipe Record:

8-5/8" set at 332'

Rotary Commenced 8-10-53

Completed 8-22-53

STATE OF KANSAS)
COUNTY OF BARTON) ss

I, M. M. Shropshire, Drilling Superintendent of the above-described well, being first duly sworn on oath, declare: That I have knowledge of the facts, statements and matters herein contained pertaining to the log of the above-described well, as filed, and that the same are true and correct.

M. M. Shropshire

Subscribed and Sworn to before me this 24th day of August, 1953.

George A Meyer
Notary Public

RECEIVED
STATE CORPORATION COMMISSION
AUG 23 1953
CONSERVATION DIVISION
Wichita, Kansas

My commission expires Feb. 10, 1955.

PLUGGING
FRI SEC 17 T 20 R 18W
BOOK PAGE 24 LINE 36