


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

McPherson County. Sec. 9 Twp. 20s Rge. 1w E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
150'w. C. W. N. N. N. N.
Lease Owner Wecker Petroleum, Inc.
Lease Name R. D. G. G. Well No. 1
Office Address P.O. 352 Carter, KS. 67428
Character of Well (Completed as Oil, Gas or Dry Hole) _____

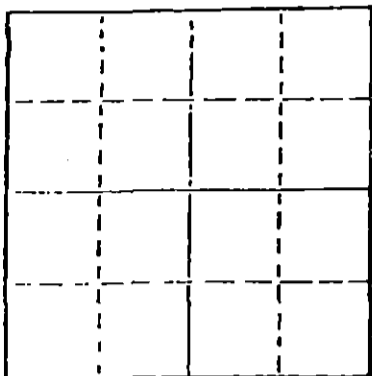

Locate well correctly on above
Section Plot

Date Well completed oil 5-30-1977
Application for plugging filed 12-22-79 1979
Application for plugging approved _____ 19____
Plugging commenced 12-27- 1979
Plugging completed 1-4- 1980
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Robert Tomlin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 306
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<u>4 1/2</u>		<u>2,023.65</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set. Push plug to bottom & sand back to 2975' and put in beach of cement. Mudded hole to 250' and made a 15' foot bridge and fill with ready mix

RECEIVED
STATE CORPORATION COMMISSION

JAN - 9 1980

1-9-1980

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Mark Hurst Casing

STATE OF Kansas COUNTY OF Osage, ss.
Mark Hurst (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Mark Hurst
2400 N. Main (Address)

SUBSCRIBED AND SWORN TO before me this 7th day of Jan, 1980

My commission expires Dec. 1 - 1982

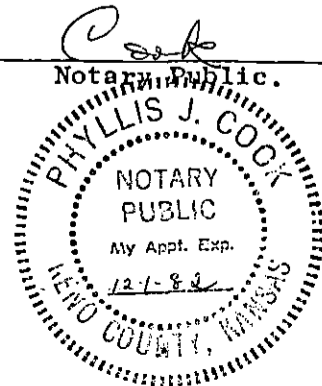

DRILLERS LOG

15.113.20436.0000

No. 1 R. Vogts

CASING RECORD:

COMPANY: Carmon Decker

DESCRIPTION:

8 5/8" @ 163'
w/125 sx cement

CONTRACTOR: Red Tiger Drilling Company

150' W-C-N/2 NW/4
Sec. 9-T20S-R1W
McPherson County, Kansas

4 1/2" @ 3,006'
w/75 sx cement

COMMENCED: May 24, 1977

COMPLETED: May 30, 1977

TOTAL DEPTH: 3,008'

ELEVATION: 1,568' KB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil	0	66	
Sand	66	112	
Shale	112	450	
Shale & Lime	450	720	
Lime w/Shale Streaks	720	900	
Shales	900	1045	
Shale w/Lime Streaks	1045	1690	
Lime w/Shales	1690	1990	
Lime & Shale	1990	2250	
Shale & Lime	2250	2425	
Lime	2425	2985	
Mississippi Lime	2985	3008	
RTD		3008	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Gloria Fawcett
Gloria Fawcett

Subscribed and sworn to before me this 6th day of June, 1977.

D'Ann Drennan
Notary Public

